

Users' Manual

for

TSGQC

ThermoSalinoGraph Quality Control

Version 1.5

Writers	
Name :	Yves Gouriou ¹ Jacques Grelet ² Gaël Alory ³

¹ US191 IMAGO, IRD, Plouzané, France

² US191 IMAGO, IRD, Plouzané, France

³ LEGOS, Université de Toulouse, Toulouse, France

1. Revision History

Dates	Versions	Chapitres concernés	Commentaires et modifications
August 2010	1.0	Creation	English version
October 2020	1.5	all	Update from french version

2. Contents

1.	REVISION HISTORY	2
2.	CONTENTS	3
3.	SOFTWARE GOALS	5
4.	INSTALLATION	5
5.	QUICK START	6
6.	FUNCTIONALITIES.....	7
A.	STARTING TSGQC	7
1.	<i>No argument mode</i>	7
2.	<i>Mode with command line argument</i>	7
B.	MAIN FUNCTIONS	9
1.	<i>Toolbar</i>	9
2.	<i>Menus</i>	10
C.	OPENING A FILE.....	14
	<i>Opening a « Merchant Vessel » TSG file (SODA format)</i>	16
1.	<i>Opening Sample Files (*.btl, *.spl, *.argo)</i>	17
D.	SAVING YOUR WORK	18
1.	<i>NetCDF format</i>	18
2.	<i>ASCII format</i>	19
E.	USING TSGQC	21
1.	<i>Parameters visualization</i>	21
2.	<i>Plotting a climatology</i>	23
3.	<i>Plotting a Map</i>	24
4.	<i>Mapping with Google Earth</i>	26
5.	<i>Zoom and Pan functions</i>	27
6.	<i>Selecting time limits</i>	28
7.	<i>Printing figures</i>	29
F.	ATTRIBUTING QUALITY CODES TO THE TSG MEASUREMENTS.....	30
G.	CALIBRATION	32
H.	INTERPOLATING LATITUDES AND LONGITUDES	33
I.	CORRECTING THE DATA.....	33
1.	<i>Description</i>	35
2.	<i>Functionalities</i>	36
3.	<i>Algorithms</i>	39
J.	DATA PROCESSING REPORT.....	42
K.	EXIT TSGQC.....	44
7.	DATA FORMAT	45
A.	NAME OF THE VARIABLES	45
1.	<i>Main variables used for TSG data</i>	45
2.	<i>Discrete sample</i>	46
B.	INPUT FILES	47
C.	OUTPUT FILES	47
D.	ARGO FORMAT (*.ARG)	47
E.	ASTROLABE FORMAT (*.AST)	48
F.	ASCII FORMAT (*.BTL, *.SPL, *.TSGQC)	49
G.	NETCDF FORMAT (*.NC).....	50
H.	SODA FORMAT (*.LBV).....	50
I.	NUKA ARTICA FORMAT (*.TRANSMIT*)	50
J.	FORMAT DES FICHIERS ORACLE (*.ORA)	50
K.	FORMAT DES FICHIERS SDF (*.SDF)	50
L.	CONFIGURATION FILE FORMAT (*.INI)	50
M.	CLIMATOLOGY FILE FORMAT	52

N.	GLOSSARY	55
8.	LIST OF FIGURES.....	56

3. Software goals

TSGQC (ThermoSalinoGraph Quality Control) software was built to **validate**, **calibrate** and **correct** salinity and temperature measurements from a thermosalinograph on board merchant ships and research vessels:

1. **Validate:** Assign Quality Control codes to every measurement.
2. **Calibrate:** Apply a linear shift to sensor measurements
3. **Correct:** Use external data such as water samples, ARGO, CTD, XCTD measurements to correct the TSG time series.

4. Installation

Follow the instructions available on the English page at the following address:
<https://us191.ird.fr/spip.php?article63>

5. Quick Start

The main steps to quality control a **TSG** file are:

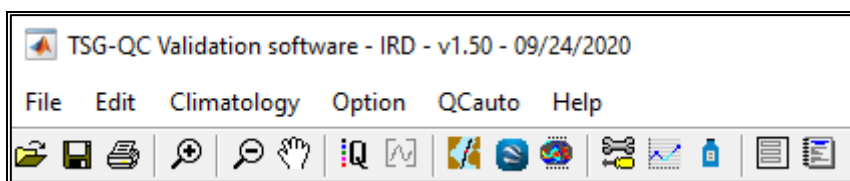


Figure 1: TSGQC menus

- | | |
|---|-------|
| 1. Start TSGQC | p. 7 |
| 2. Open a TSG file . Several formats are available | p. 14 |
| 3. Visually check the data | |
| a. Compare the measurements to a climatology | p. 22 |
| b. Plot the ship track | p. 23 |
| 4. Check that every measurement has a position | p. 33 |
| 5. Assign a quality code to every measurement | p. 30 |
| 6. Save your work | p. 18 |
| a. NetCDF format | p. 19 |
| b. ASCII format | p. 19 |
| 7. Open sample files | p. 17 |
| 8. Adjust the TSG data to the sample measurements | p. 32 |
| 9. Print figures | p. 29 |

Secondary **TSGQC** functions:

- | | |
|---------------------------|-------|
| 1. Automatic tests | p. 10 |
| 2. TSG calibration | p. 32 |
| 3. Data processing report | p. 42 |

6. Functionalities

A. Starting TSGQC

Open a MATLAB 'Command Window'.

The data directory can be chosen in the list-selection dialog box.

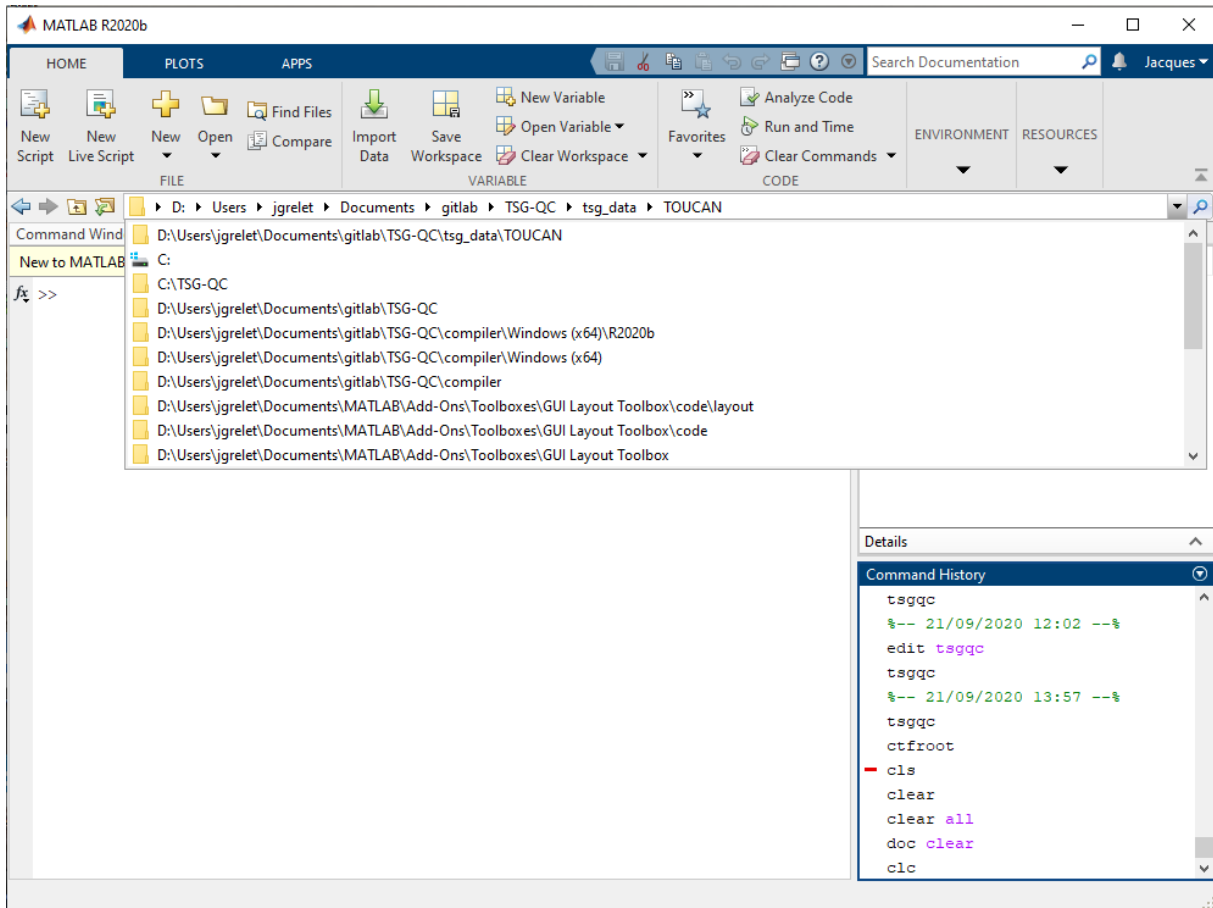


Figure 2: Getting Started

1. No argument mode

Type the name of the program in the command window:

```
>> tsgqc
```

The software functionalities can be used once a **TSG** file has been read (p. **Erreur ! Signet non défini.**)

2. Mode with command line argument

The TSGQC software accepts some arguments such as mainly reading a data file without going through the "File/Open" menu.

Usage:

```
>> tsgqc --help
Usage:
tsgqc('<file>')
tsgqc('inputfile','<file>')
tsgqc('help','true')
tsgqc --help
tsgqc('inputfile', '<file>','debug',1)
```

Example of syntax:

```
>> tsqqc('TOUC0702.lbv')
>> tsqqc('TOUC0702.nc')
>> tsqqc('inputfile','TOUC0702.nc','debug',1)
>> tsqqc('ABRACOS2/*.cnv')
>> tsqqc('*.cnv')
```


B. Main functions













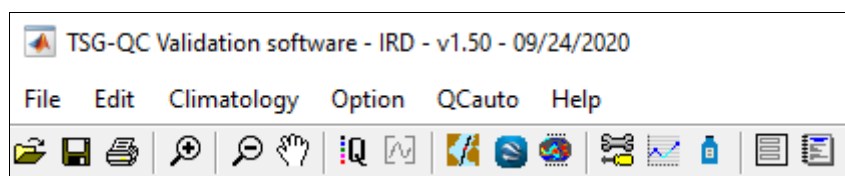





Figure 3: Icon bar

1. Toolbar

	Open files	p. 14
	Write files in NetCDF	p. 18
	Print figures	p. 29
	Zoom in	p. 26
	Zoom out	p. 26
	Enable and disable pan mode on a plot	p. 26
	Quality Control module	p. 30
	Select date limits	p. 28
	Vessel track map	p. 24
	Plot climatology	p. 23
	Calibration module	p. 32
	Interpolate missing positions	p. 33
	Correction module	p. 33
	Fill Meta-Data form	p. 18
	Write a report file	p. 41

2. Menus

FILE menu

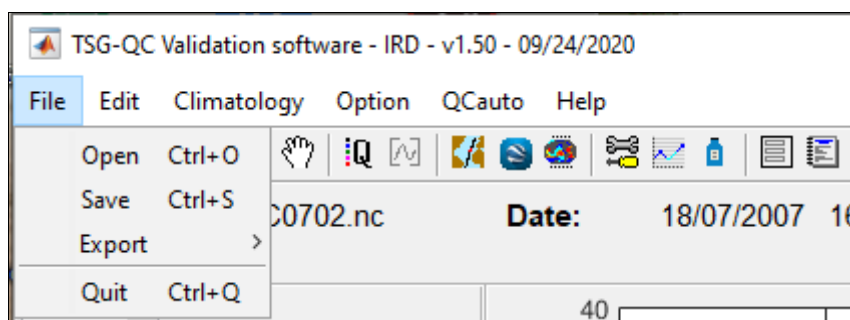


Figure 4: File menu

Open	Open a file (TSG , samples, etc,)	p. 14
Save	Save the data in NetCDF format	p. 18
Export	Save the data in ASCII format <ul style="list-style-type: none">▪ TSG measurements▪ Samples (Water Samples, CTD, ARGO, ...)	p. 19
Quit	Quit TSGQC	p. 44

Edit menu

This menu is not implemented.

Climatology menu

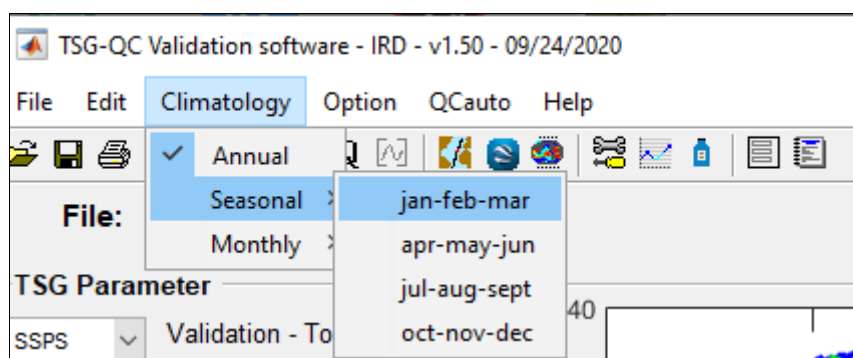


Figure 5: Climatology menu

This menu allows the user to choose the period of the climatology to superimpose on the time series measurements:

1. Annual
2. Seasonal
3. Monthly

The climatology source and its depth can be selected through the **Option - Preferences menu** (see next paragraph)

Option menu

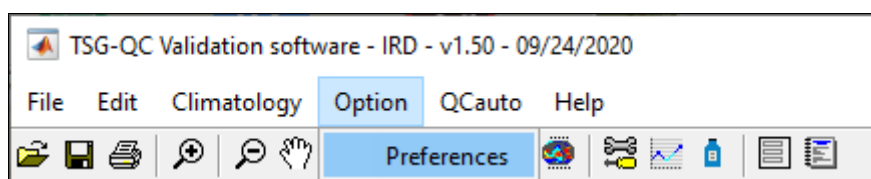


Figure 6: Option menu

The **Option - references** menu is used to set the following preferences:

- ✓ Climatology and its depth
- ✓ Calibration coefficient types
- ✓ Figures
- ✓ Limits for automatic tests to apply with the **QCauto** menu (next paragraph)

p. 22

Figure 7: Preferences setting

QCauto menu

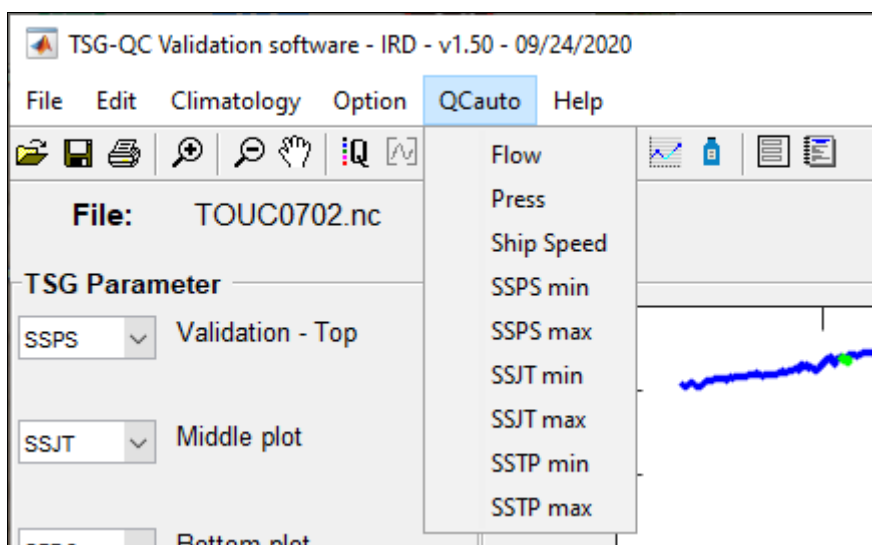


Figure 8: Quality Control menu

QCauto allows the user to apply automatic tests to the TSG time series. The tests use limits defined in the “**Option - Preferences**” form (see previous paragraph).

A Quality Code “BAD” is applied to measurements outside the limits defined for the test.

Remarks :

- ✓ There is no Undo function.
- ✓ Quality code “HARBOUR” is applied to measurements carried out when the speed of the vessel is below the “Ship Speed Min” value.
- ✓ Be careful with automatic tests. For example when a vessel is stopped, measurements can be BAD simply because there is no more water pressure in the TSG. In that case the quality code should be set to “BAD” and not to “HARBOUR”. For research vessels, a null speed in the open ocean is common during measurement stations and should be set to “GOOD”, not to “HARBOUR”.

Help menu

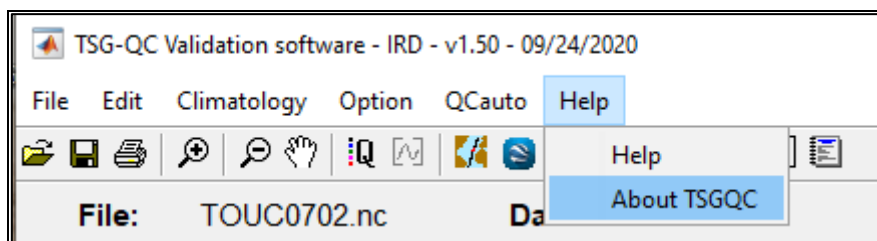


Figure 9: Help menu

The online help is not yet implemented.

About TSGQC displays the SO-SSS logo and some configuration parameters:



Figure 10: Help dialog box

C. Opening a File

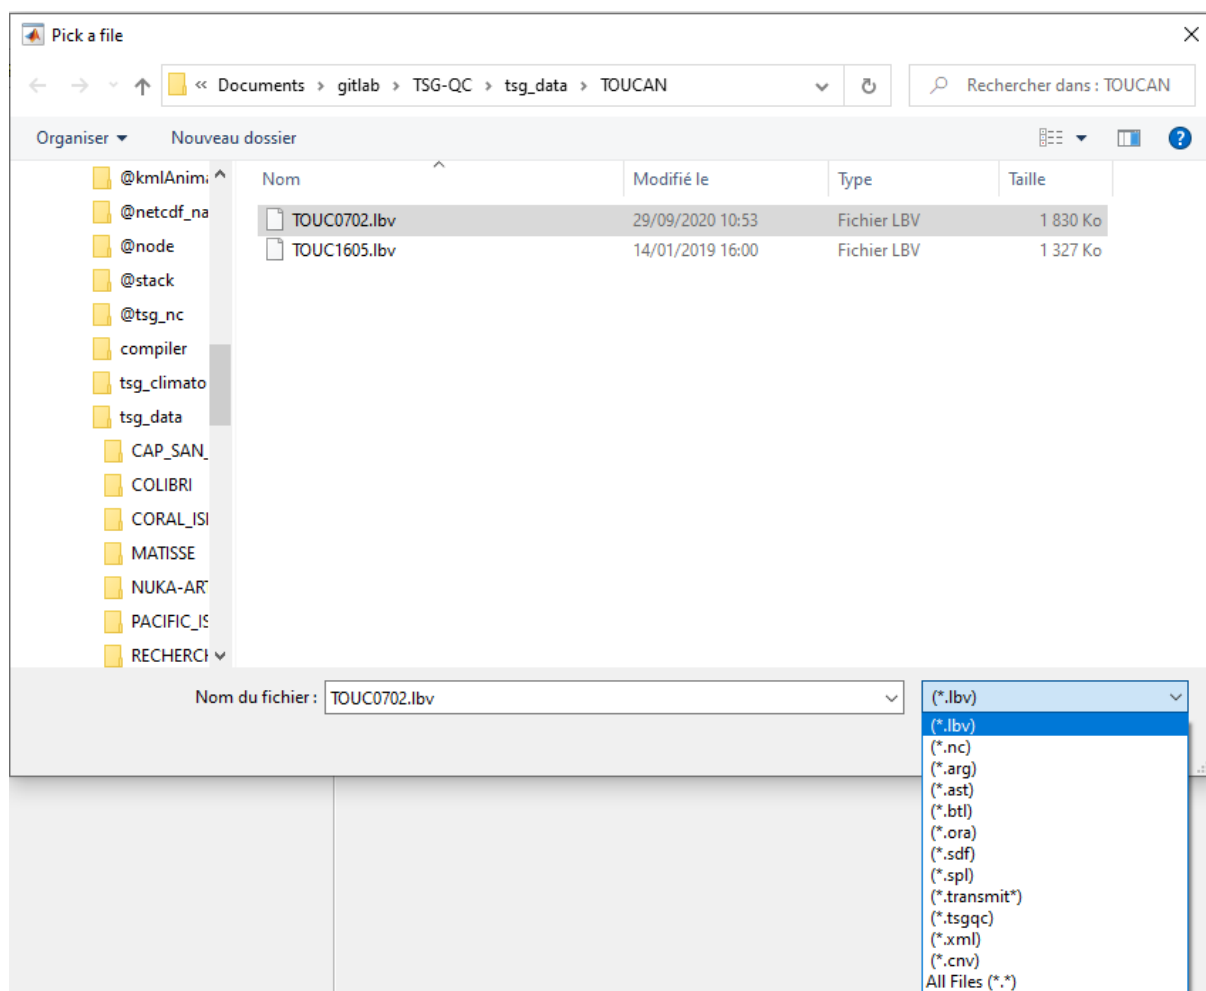


Figure 11: Opening a file



Several file types can be read in TSGQC:

*.arg	ARGO data file created by G. Reverdin ⁴ team along the ship track
*.ast	TSG file from the ASTROLABE ship
*.btl	Water Sample file (ASCII format)
*.lbv	TSG file (SODA ⁵ format) from merchant ships (SOERE SSS)
*.nc	TSG file (NetCDF format)
*.ora	TSG file in ORACLE format formerly used by SOERE SSS
*.sdf	TSG file in SDF format formerly used by SOERE SSS
*.spl	' Sample ' files (XBT, CTD, etc. - ASCII format)
*.transmit	TSG file from the merchant ship NUKA ARTICA
*.tsgqc	TSG file (ASCII format)
*.xml	XML file in the format used at the US IMAGO for trajectory data.
*.cnv	ASCII file in Seabird format from Sbe-processing

⁴ Reverdin G. UMR LOCEAN, Jussieu, Paris

⁵ Varillon D., Shipboard Oceanographic Data Acquisition - S.O.D.A Version 1.00 - Manuel d'utilisateur, 2009

Format description can be found on page:

*.arg	p. 47
*.ast	p. 48
*.btl	p. 49
*.lbv	p. 50
*.nc	p. 50
*.ora	p. ??
*.sdf	p. ??
*.spl	p. 49
*.transmit	p. 50
*.tsgqc	p. 49

Remark:

A test on double records is performed for:

1. **TSG** measurements: If consecutive identical records are detected the following message box is displayed. The message gives the number of double records and displays the 10 first identical dates. Double records are deleted.

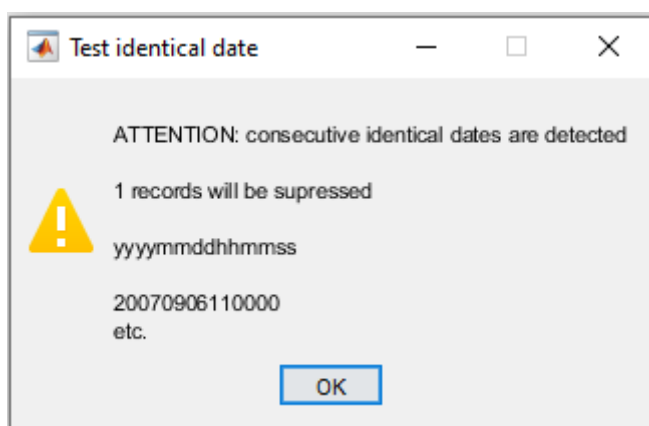


Figure 12: : Test on duplicate recordings

2. **Sample** measurements: The duplicate test is performed on the date and time comparison. No message box is displayed. Double records are deleted.

Sample file (*.btl, *.spl, *.arg) cannot be read if no **TSG** file was read. If the user tries to load a 'sample' file, the following window appears:

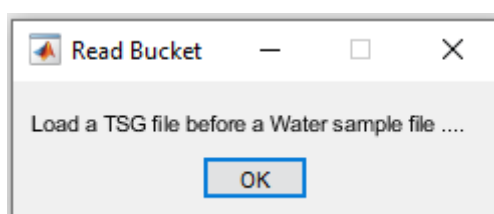


Figure 13: Dialog box, error while reading samples

Opening a « Merchant Vessel » TSG file (SODA format)



When opening a Merchant Vessel file in the **SODA**⁶ format, the following window is displayed:

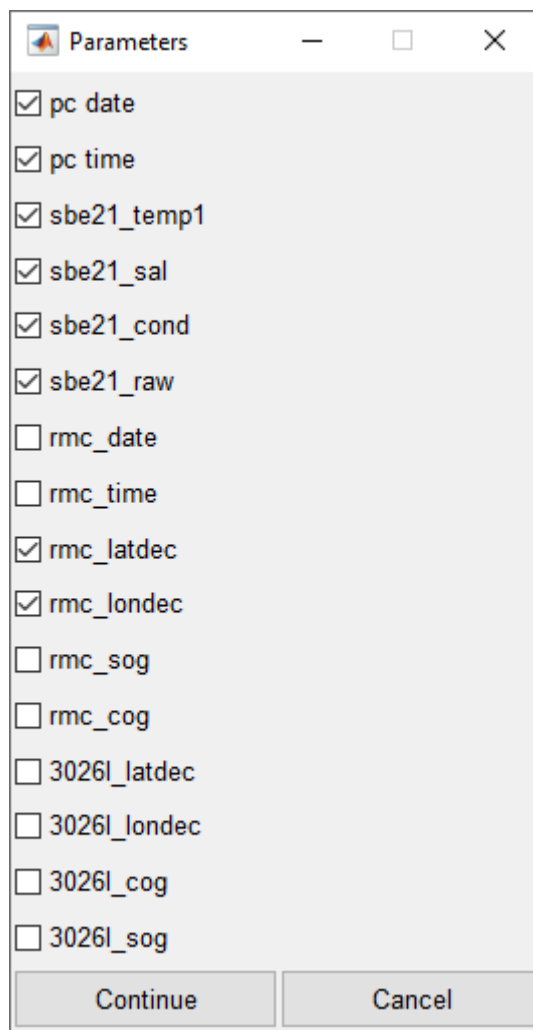


Figure 14: SODA software, selection of parameters

This window gives a list of the variables found in the header line. **TSGQC** automatically selects the variables essential to its running. The user can modify these choices. For example it is better to choose a GPS date and hour than a PC time.

sbe21_raw variable stores frequency measurements made by the Sea-Bird **TSG**. This information is recorded in NetCDF file.

sbe21_ad1 variable stores flow measurements. Data are stored in the NetCDF FLOW variable.

Remark:

The vessel speed stored in SODA file (variable SOG) is truncated. It is better to uncheck this variable and let the software compute the ship speed from measurements positions.

⁶ Varillon D., Shipboard Oceanographic Data Acquisition - S.O.D.A Version 1.00 - Manuel d'utilisateur, 2009

1. Opening Sample Files (*.btl, *.spl, *.argo)

Samples (variable with extension _EXT in the NetCDF format) can be used to correct the TSG measurements.

It is possible to open and concatenate several sample files. A message box asks if the user wants to replace or concatenate the sample file already loaded in memory.

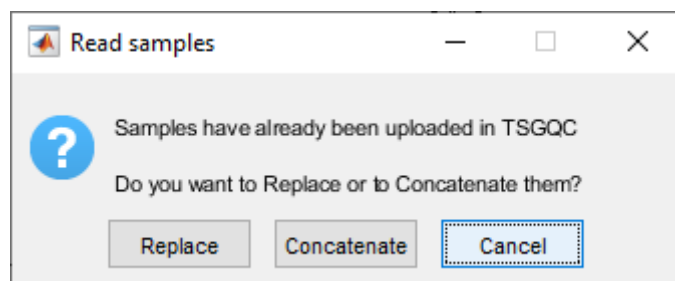


Figure 15: Sample reading dialog box

Remark :

1. If two or more files are concatenated, **TSGQC** tests for double records. The test is made on the date (year, month, day, hour, minute, second). Double records are deleted. No message box indicating that double records were detected is displayed.
2. **Sample** files (*.btl, *.spl, *.arg) cannot be read if there is no **TSG** file in memory. In that case the following message box is displayed:

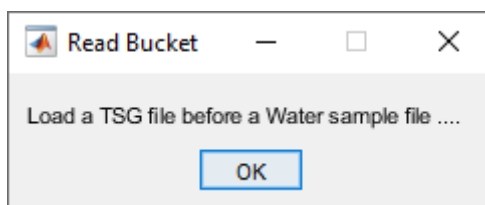


Figure 16: Dialog box, error while reading samples before data

D. Saving your work

1. NetCDF format



The default-recording format is **NetCDF** (see p. 50). Every information (raw data, calibrated data, adjusted data, sample data, meta-data) is stored in the **NetCDF** file.

Metadata are either read in the original file or the user fills the following input form.

This form is automatically displayed when recording a **NetCDF** file. The form is also available through the shortcut

TSG GLOBAL ATTRIBUTES AND VARIABLES			
title	TSG GOSUD	Conventions	CF1.4, GOSUD 3.0
cycle_mesure	A description of the dataset TSGG0702	date_creation [yyyymmddHHMMSS]	20090721144811
platform_name	Toucan	date_update [yyyymmddHHMMSS]	20090911135036
project_name	SO-SSS	data_restrictions	N/A
ship_call_sign	FNAV	citation	N/A
ship_mmsi	N/A	comment	N/A
date_tsg [yyyymmddHHMMSS]	N/A	pi_name	Denis Diverres
type_tsg	SBE21	data_centre	N/A
number_tsg	N/A	data_acquisition	IRD
date_tint [yyyymmddHHMMSS]	N/A	processing_centre	SO-SSS
type_tint	SBE38	processing_states	0A

Figure 17: NetCDF Metadata Entry Form

CYCLE_MESURE and **PLATFORM_NAME** are the only information necessary to save a file. In general use the ship name in upper-case letters.

For a given **PLATFORM_NAME** some metadata are saved in an ASCII file. As soon as the user enters a **PLATFORM_NAME**, **TSGQC** scans the ASCII file to get all the information about this **PLATFORM_NAME**.

It is recommended to regularly save one's work.

2. ASCII format

This format can be used for **TSG** and **Sample** measurements. To save data in the ASCII format use the **File - Export** menu.

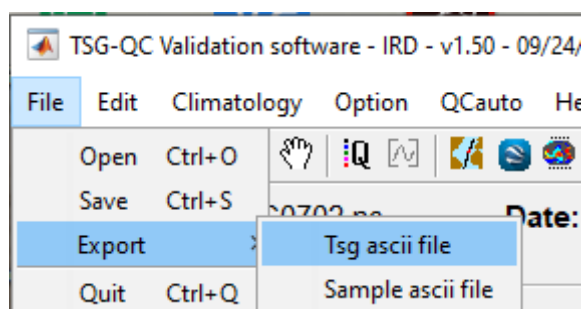


Figure 18: Export in ASCII

The user can export :

- ✓ Data **samples** (extension name: **.spl**): A **.spl** file contains all data **samples** loaded in **TSGQC**. **TSGQC** proposes to export the following variables:

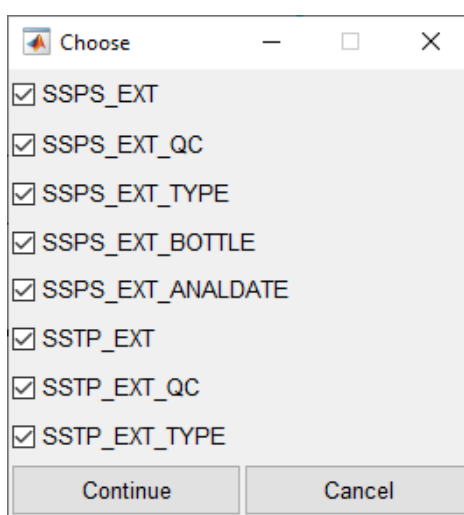


Figure 19: : Choice of parameters exported in ASCII

Remark:

For the ARGO file the mean time difference between the TSG and ARGO measurements is added to the ARGO date (column 17 of the ***.arg** file see p. 47). It is this date, referring to the TSG measurement, which is recorded in the NetCDF and ASCII file.

- ✓ **TSG** data (file with extension **.tsgqc**). **TSGQC** proposes to export the following variables:

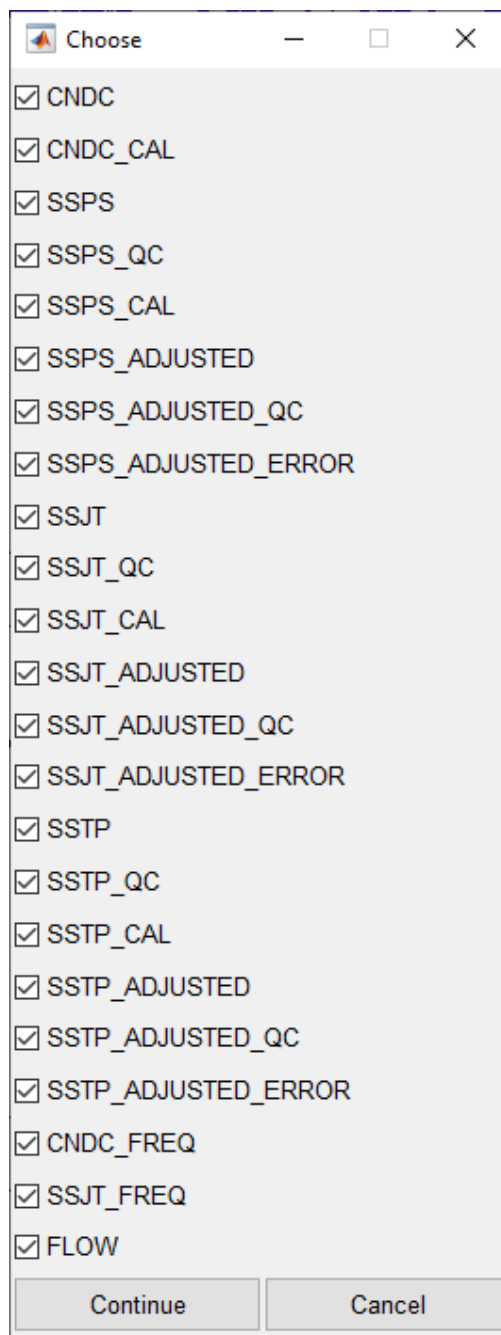


Figure 20: Choice of parameters exported in ASCII

A description of the ASCII format is given p. 49.

E. Using TSGQC

1. Parameters visualization

Once a **TSG** file has been loaded TSGQC displays 3 figures. The default variables plotted in the figures are:

1. **SSPS**: The salinity in the upper plot. This is also the validation window.
2. **SSJT**: Jacket TSG temperature in the middle plot.
3. **SPDC**: The vessel speed in the bottom plot.

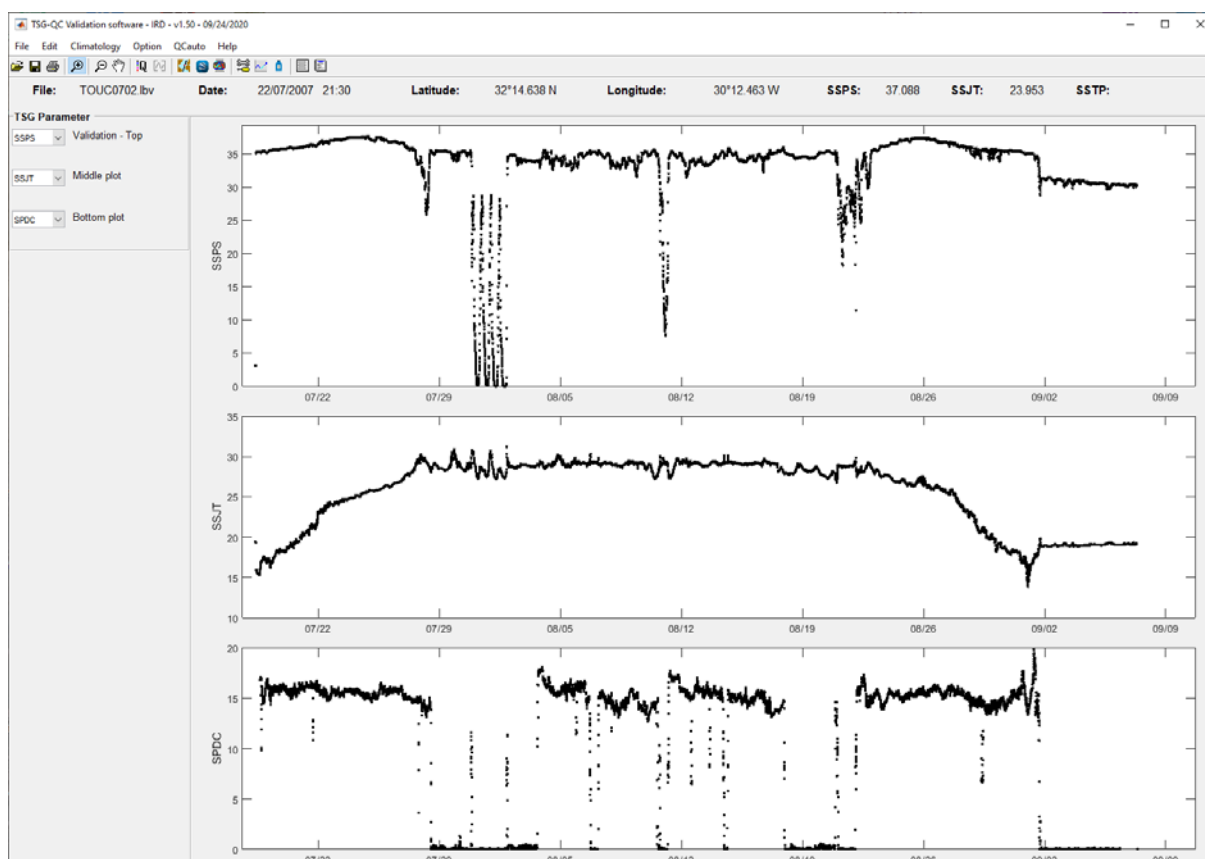


Figure 21: Main graphic window

Y-axis labels correspond to the parameter names in the NetCDF file.

When the user moves the pointer on the TSG curve, information on the date, position, salinity and temperature are displayed in the upper banner

File: touc0702.nc **Date:** 25/07/2007 14:15 **Latitude:** 19°03.355 N **Longitude:** 41°35.439 W **SSPS:** 37.552 **SSJT:** 25.901

The user can choose the parameters that will be plotted in the three figures. For this, use the three list-selection dialog boxes in the frame box '**TSG Parameter**' on the left of the screen.

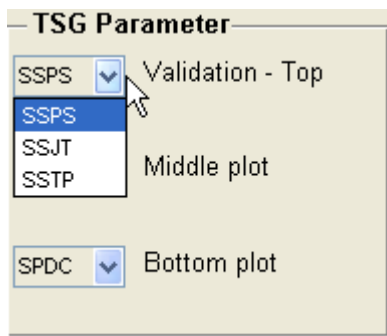


Figure 23: Main graphic choice

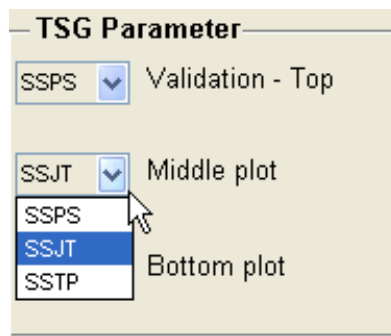


Figure 22: Secondary Graphic Choice

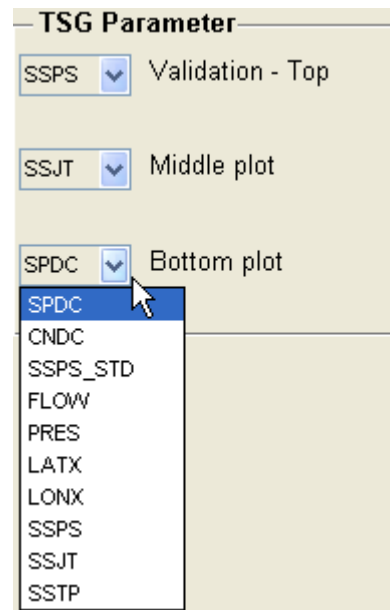


Figure 24: Lower graphic choice

Parameters:

SSPS	Salinity measured by the TSG .
SSJT	Jacket temperature measured by the TSG .
SSTP	Temperature given by a sensor different from the TSG (SBE 38 for example)
SPDC	Ship speed.
CNDC	Conductivity measured by the TSG
SSPS_STD	For average or median TSG records this variable gives the standard deviation on the average or median period.
FLOW	Sea water flow in the TSG .
PRES	Water pressure in the TSG
LATX	Latitude in decimal degree
LONX	Longitude in decimal degree

Remark:

- If the ship speed is not available in the **TSG** file, it is computed by using **TSG** measurement positions.
- If conductivity CNDC and jacket temperature SSJT from the TSG are available, they are used to compute salinity SSPS.

2. Plotting a climatology



The user can choose a climatology file in the **Option - Preferences** menu. The only available climatologies are World Ocean Atlas⁷ WOA13, WOA15 and WOA18 from NOAA and ISAS13 and ISAS15⁸ from LOPS/IFREMER. Climatology depth can also be modified in this menu. The user can choose between 0 and 10 m.

The mean climatology value (black line) minus/plus 3 times the standard deviation (red lines) is superimposed on the TSG measurement curve (salinity and temperature).

By default, the annual climatology is displayed. The user can display seasonal or monthly climatologies using the '**Climatology**' menu (see p.9).

The format of the climatology files is described p. 52

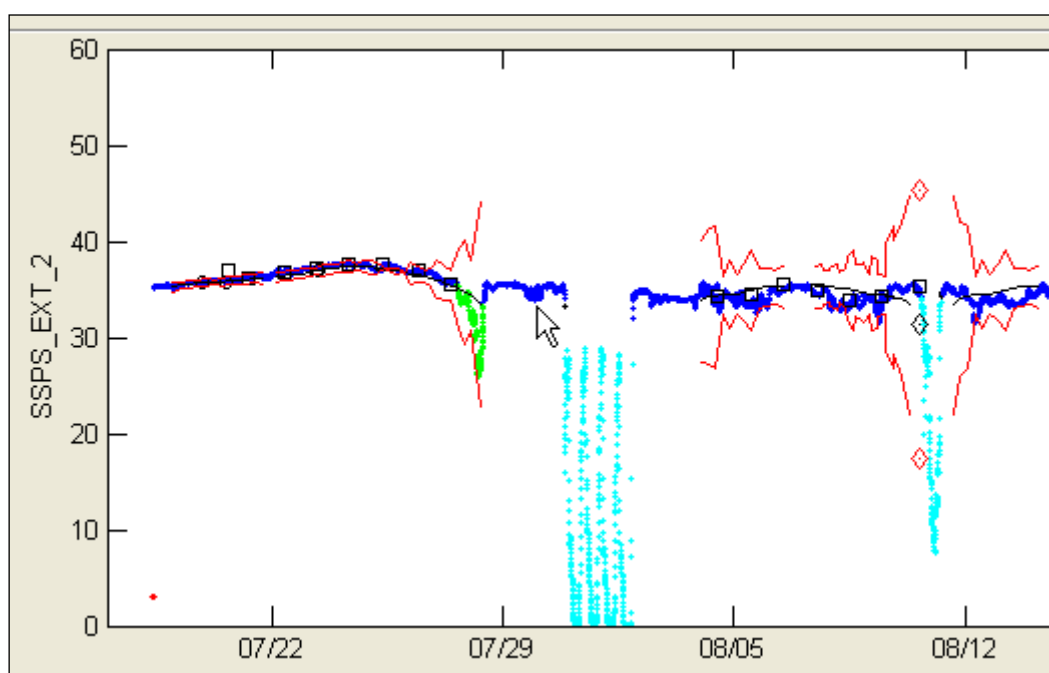


Figure 25: Climatology display

⁷ <https://www.nodc.noaa.gov/OC5/woa18/>

⁸ <http://journals.ametsoc.org/doi/abs/10.1175/JCLI-D-15-0028.1>

3. Plotting a Map

Click the following shortcut  to get the ship track plotted on a Mercator projection map.

The ship position corresponding to the pointer position on the **TSG** time series (upper plot) is shown as a red circle on the cruise track. This is useful to validate the **TSG** measurements.

The plot is made taking into account the temporal limits of the upper plot: if the user zooms in the **TSG** time series, the map is also zoomed in. The map limits are updated automatically.

The colours associated with the quality codes assigned to the **TSG** measurements are reported on the cruise track.

The map opens in a new MATLAB graphics window. The menus in this window can be used to change the appearance of the map, display the surface climatology in the study area if it is activated in the main window, and print or export the map to a graphic file.

The resolution and type of the coastlines can be selected via the "Map" and "Type" menus respectively. The user should choose a low resolution with the "Type/Patch" mode, otherwise the display will be slowed down when the map is refreshed.

The map can be displayed in several TSGQC modules.

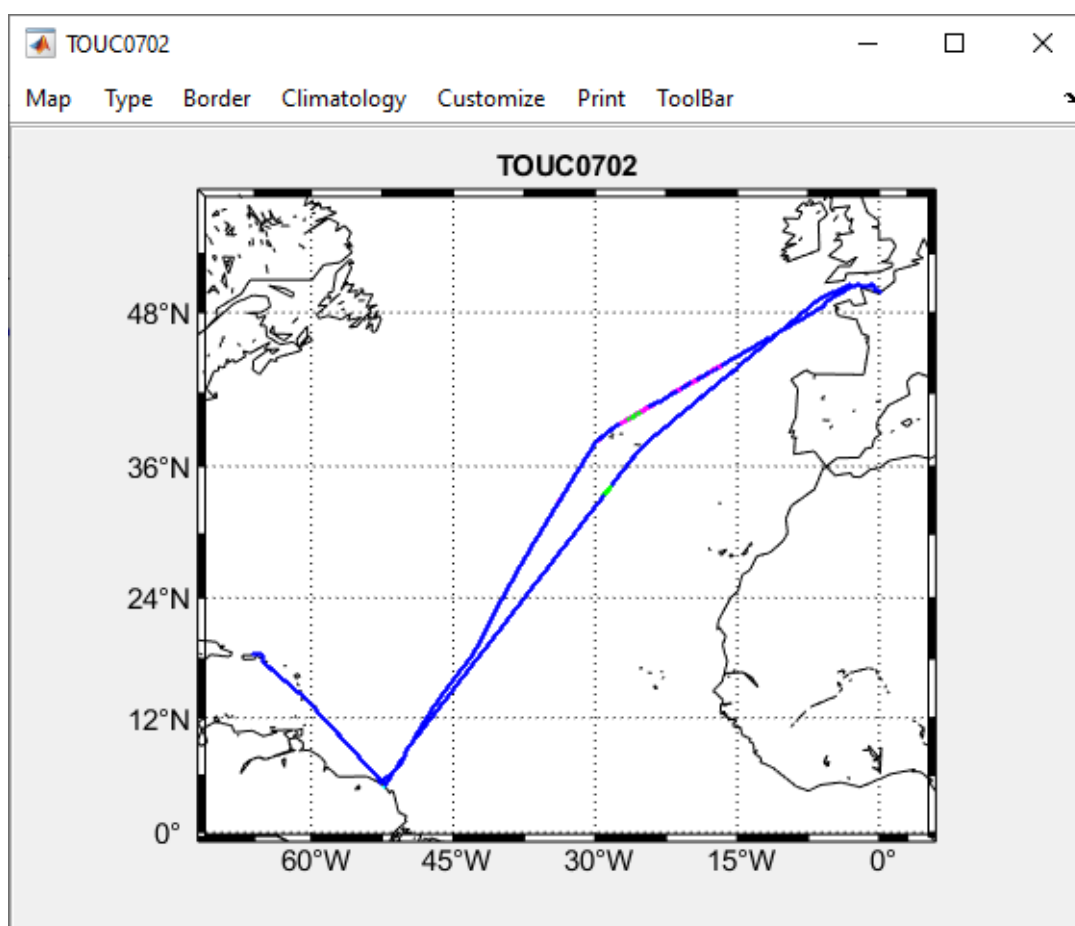


Figure 26: Cartography display with the *m_map* toolbox

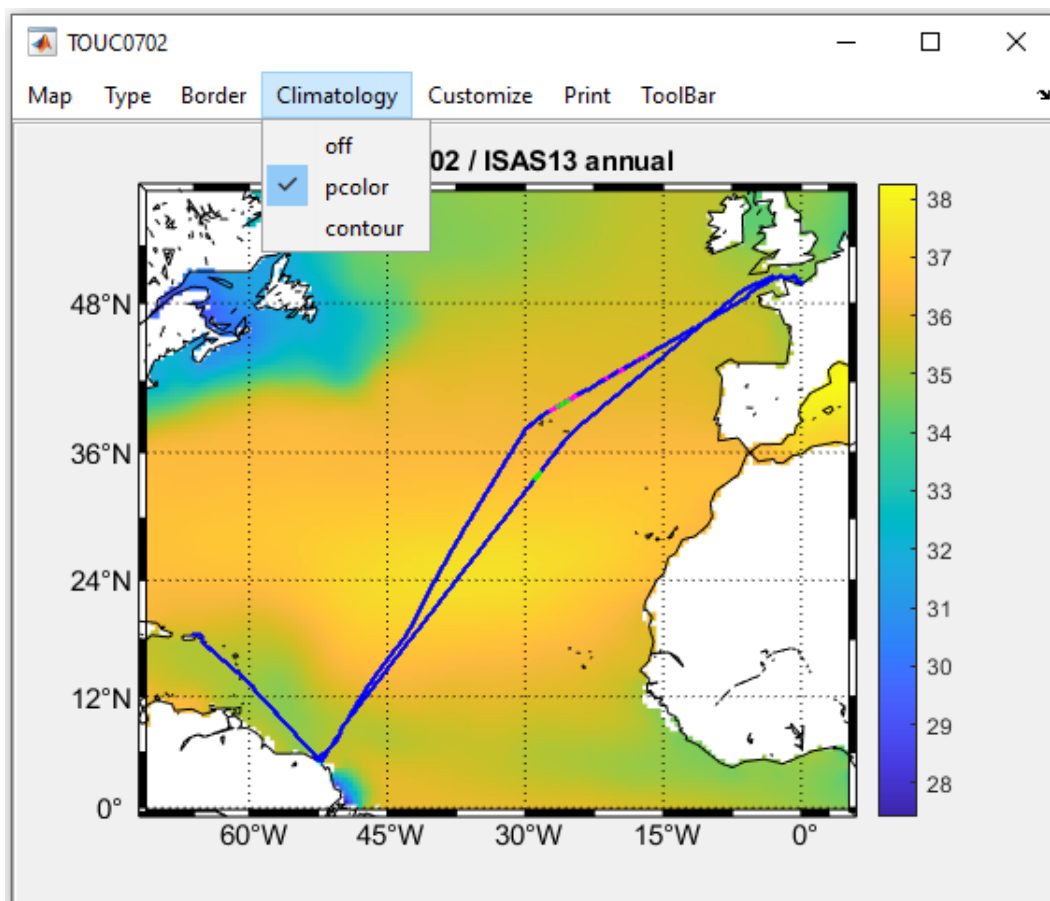


Figure 27: Cartography display with surface climatology, pcolor mode

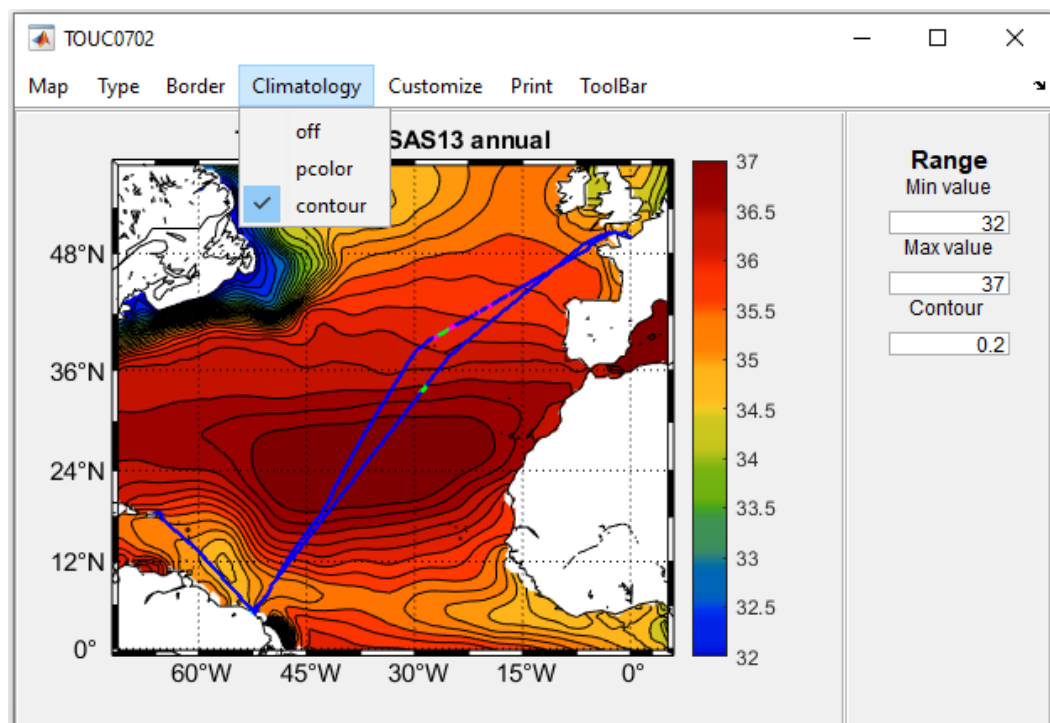


Figure 28: Cartography display with surface climatology, contour mode

4. Mapping with Google Earth

By clicking on the Google Earth icon, the trajectory of the ship is displayed on the world map. By zooming in, it is possible to have an extremely precise view of the ship's position. On the other hand, it is not possible to interactively view the associated salinity and temperature measurements.

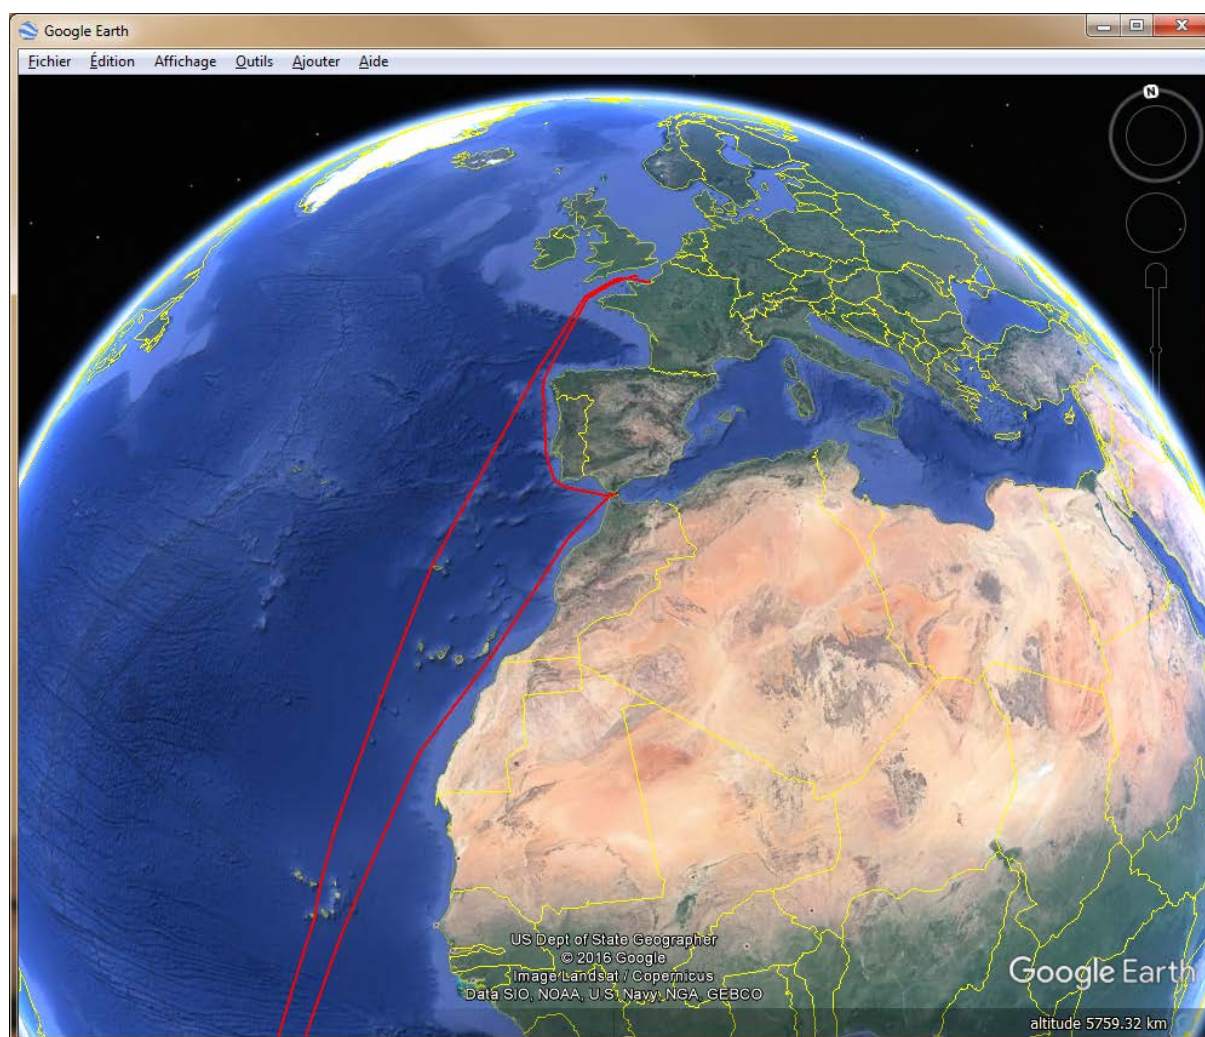


Figure 29: Displaying Google Earth cartography

5. Zoom and Pan functions



Zoom tools : The user can increase or decrease part of the time series. Zooming is useful to see greater detail in a small area. When using zoom in mode, the user can draw a rectangle with the pointer around the time series to magnify.

The 3 plots undergo the same change.



You can move your view of a graph up and down as well as left and right with the **Pan** tool. Panning is useful when you have zoomed in on a graph and want to translate the plot to view different portions.

The 3 plots undergo the same displacement.

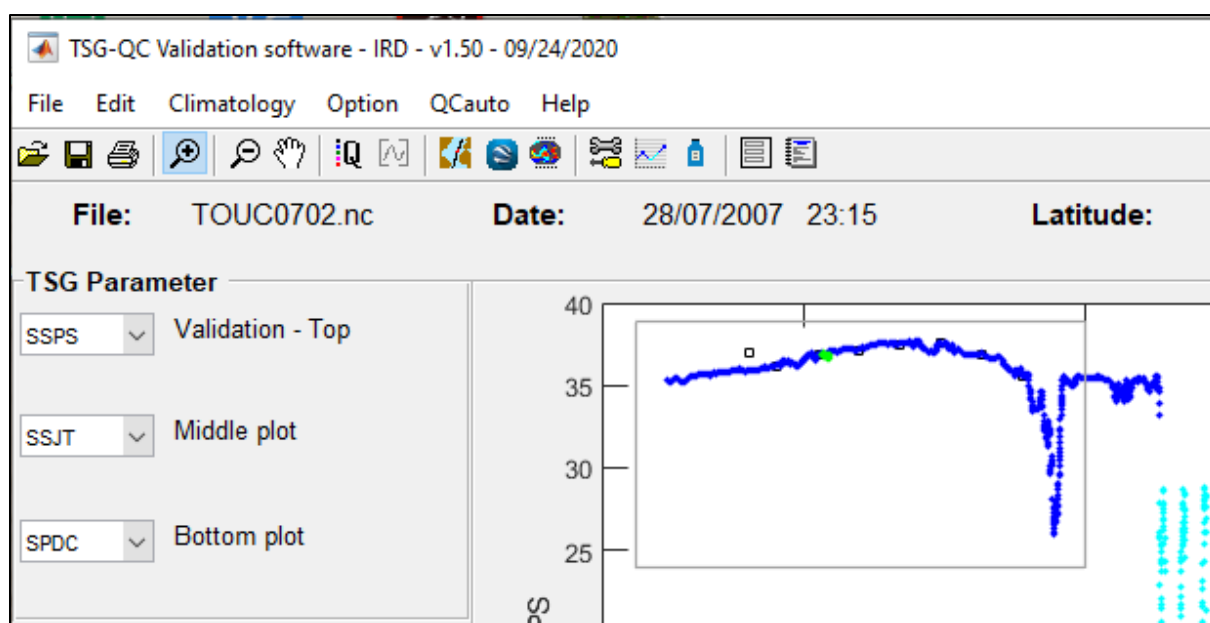


Figure 30: Zoom function

In **Zoom** and **Pan** modes, if you want to reset the graph to its original view, right-click to display the context menu and select **Reset to Original View**.



Remark :

When the validation module is active, (see p.26), the '**Pan**' function is directly available when moving the mouse pointer at the bottom of the upper plot.

6. Selecting time limits



The user can select part of the time series by setting time limits in the left panel '**Date Limits**'. The selection can be made:

- ✓ Manually by using the input dialog box of the '**Date Limits**' panel.
- ✓ With the mouse, by selecting a portion of the time series. The time limits of the rectangle defined by the pointer are entered automatically in the input dialog box.

This tool can be used in the interpolation and correction modules of TSGQC.

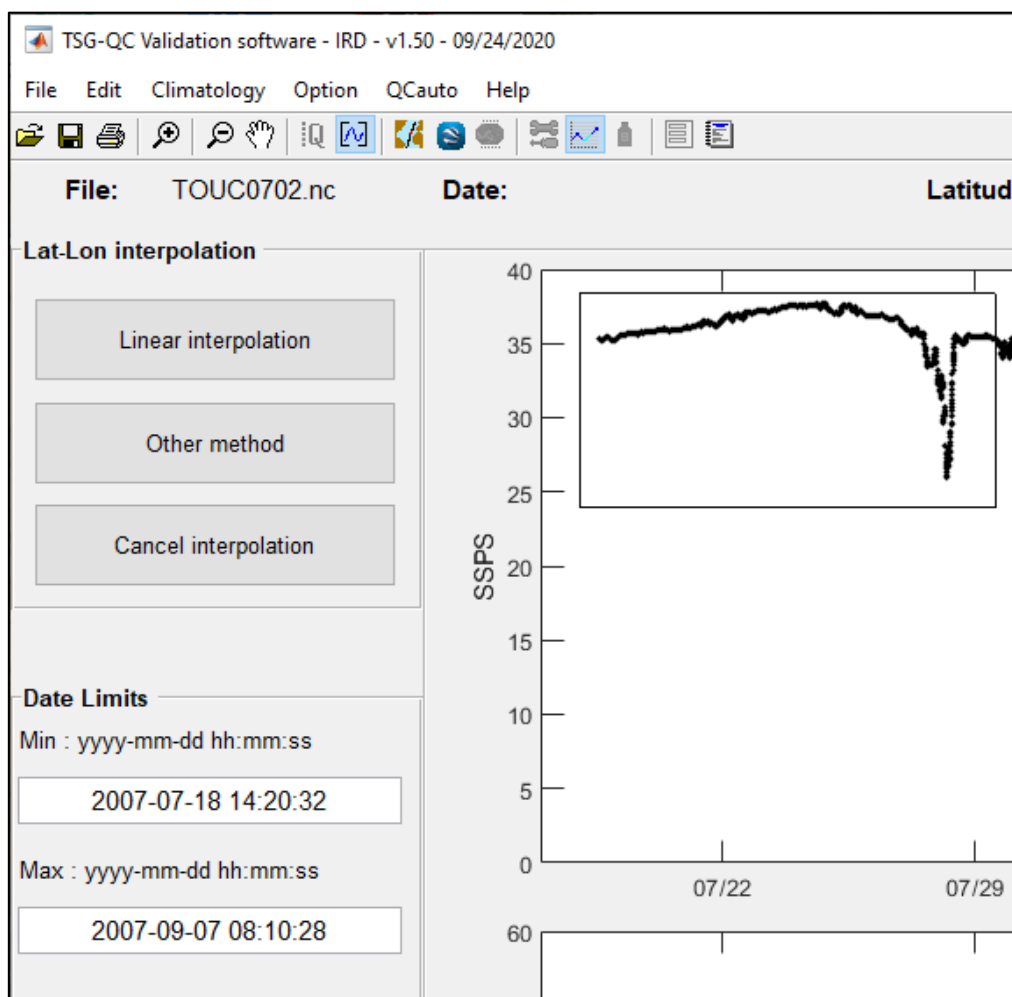



Figure 31: Selection of time limits

7. Printing figures



This is a simplified tool to print **TSGQC** plots. Whatever the **TSGQC** module you are working on, you can print the plots displayed on the screen by clicking on the icon . The plots will be drawn inside a MATLAB FIGURE WINDOW.

Then you can use the MATLAB menus to print, save or export the plots.

Note that the cruise track is plotted directly in MATLAB FIGURE WINDOW.

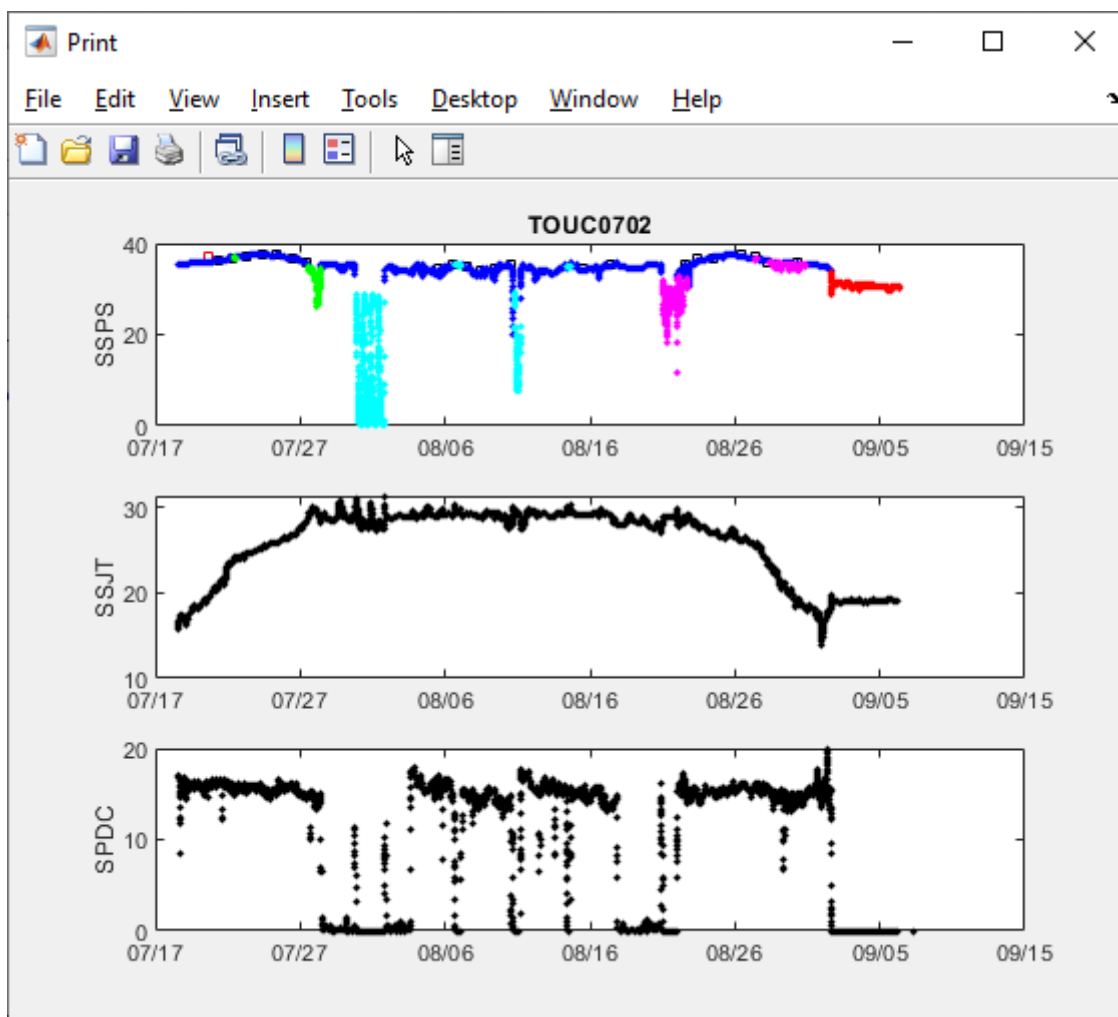


Figure 32: Printing of figures

F. Attributing Quality codes to the TSG measurements

The user can assign a quality code only to the measurements of the time series displayed in the upper plot. Quality code can be attributed to the 3 variables **SSPS**, **SSJT**, and **SSTP**. You have to display the variable that you want to assign the quality code (see p. 21). By default the quality code 'NO CONTROL' is assigned.



When the validation module is active, quality codes are displayed on the left of the screen, inside the **"Validation Codes"** panel. The number to the right of the radio buttons give the number of measurements assigned to a particular code (7677 have a quality code GOOD in the example below).


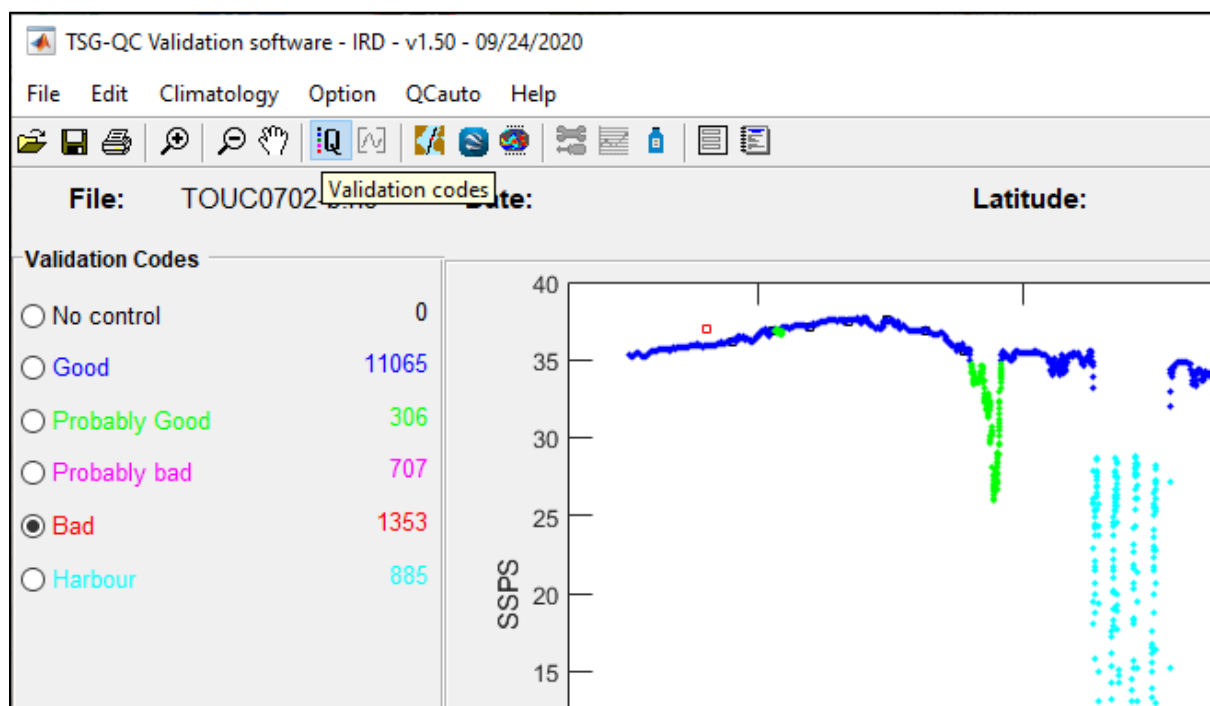


Figure 33: Validation module

To select a part of the time series, move the cross-shape pointer on the time series and click the right mouse button to draw a rectangle which sets the limits of the data measurements whose quality codes will be modified. The code can be chosen with 2 methods:

1. Before the selection, click the mouse button on the chosen code in the **"Validation Codes"** panel.
2. After the selection, right-click to display the following context menu and choose the code:



Selected data get the colour of the chosen code. The HARBOUR code is designed to mark good data taken when the ship is in a port. If the data are not of a good quality, choose another code.

It is of good practice to zoom in the time series, to work with precision.

You can plot a vertical line that spans the three plots to spot particular features:

1. Left-click on the upper plot.
2. Press the Ctrl Key : The vertical line is plotted. Release the key: It disappears. Then move the pointer to another position and press the Ctrl Key.

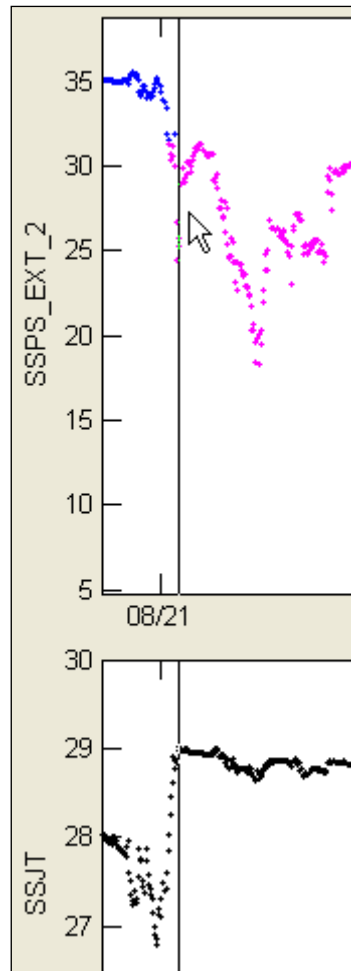


Figure 34: Display of the vertical selection bar

Important :

1. There is a shortcut to **Pan** the figure while you are attributing a quality code to the measurements. The **Pan** function is available when you move the pointer in the bottom part of the upper plot. The pointer shape changes from a cross shape to a hand shape, indicating that the **Pan** function is activated.
2. If the map is displayed when you execute a **Pan** operation, the map is redrawn and takes into account the new limits.
3. When all the quality codes have been attributed it is important to check that the number of **No Control** codes is equal to 0.

G. Calibration



You can apply a linear shift (slope and offset) to the conductivity (CNDC) and jacket temperature (SSJT) time series (or part of).

Enter the slope and offset in the input dialog box in the **Calibration** panel for:

1. The conductivity
2. The jacket temperature (temperature measured by the TSG)
3. Precise Temperature if a sensor exists.

Once these data are entered click on the '**Calibrate**' button. Calibrated data are kept in variables with **CAL** extension: **SSPS_CAL**, **SSJT_CAL**...

Non-calibrated data are plotted in black, calibrated data in red.

Use the '**Cancel Calibration**' button to cancel the corrections.

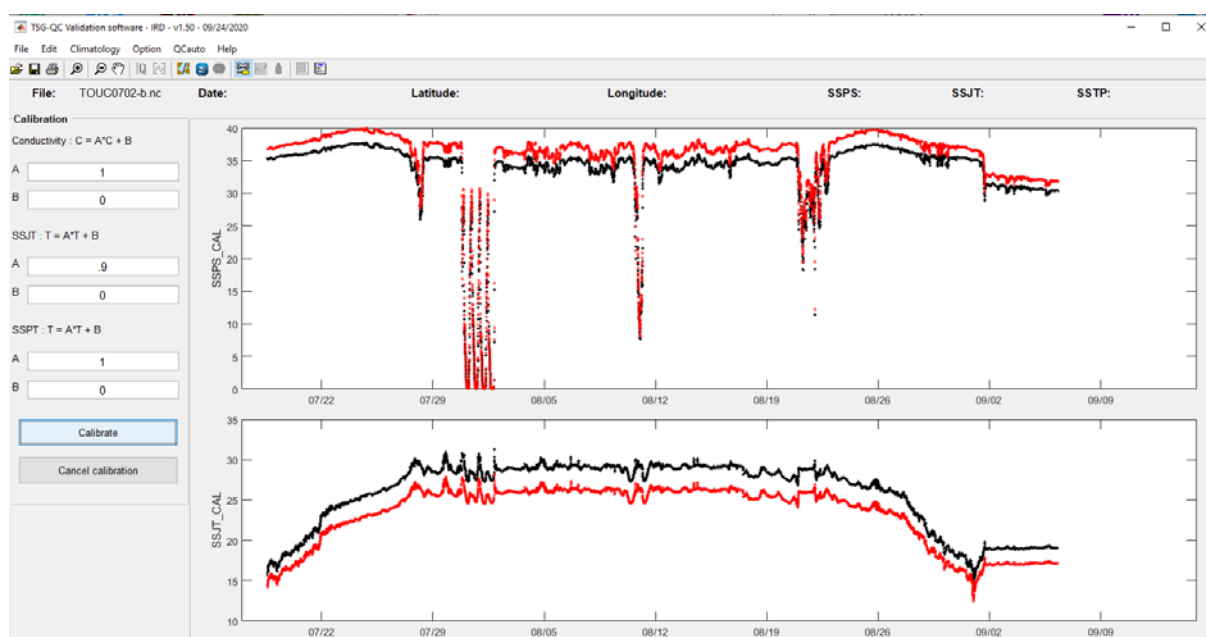


Figure 35: Calibration module display

Remark:

That function is not frequently used. It is better to use Samples to correct/Adjust the data.

H. Interpolating latitudes and longitudes



Disruption of GPS acquisition can lead to get salinity and temperature measurements without any position (but referenced in time from the PC for example).

A latitude and longitude can be assigned to this measurement using a linear interpolation between known positions. This is a crude method which supposes that the ship has a constant velocity and a straight trajectory. However the method is satisfactory in the cases when periods without positions are small. The interpolation figure window is the following:

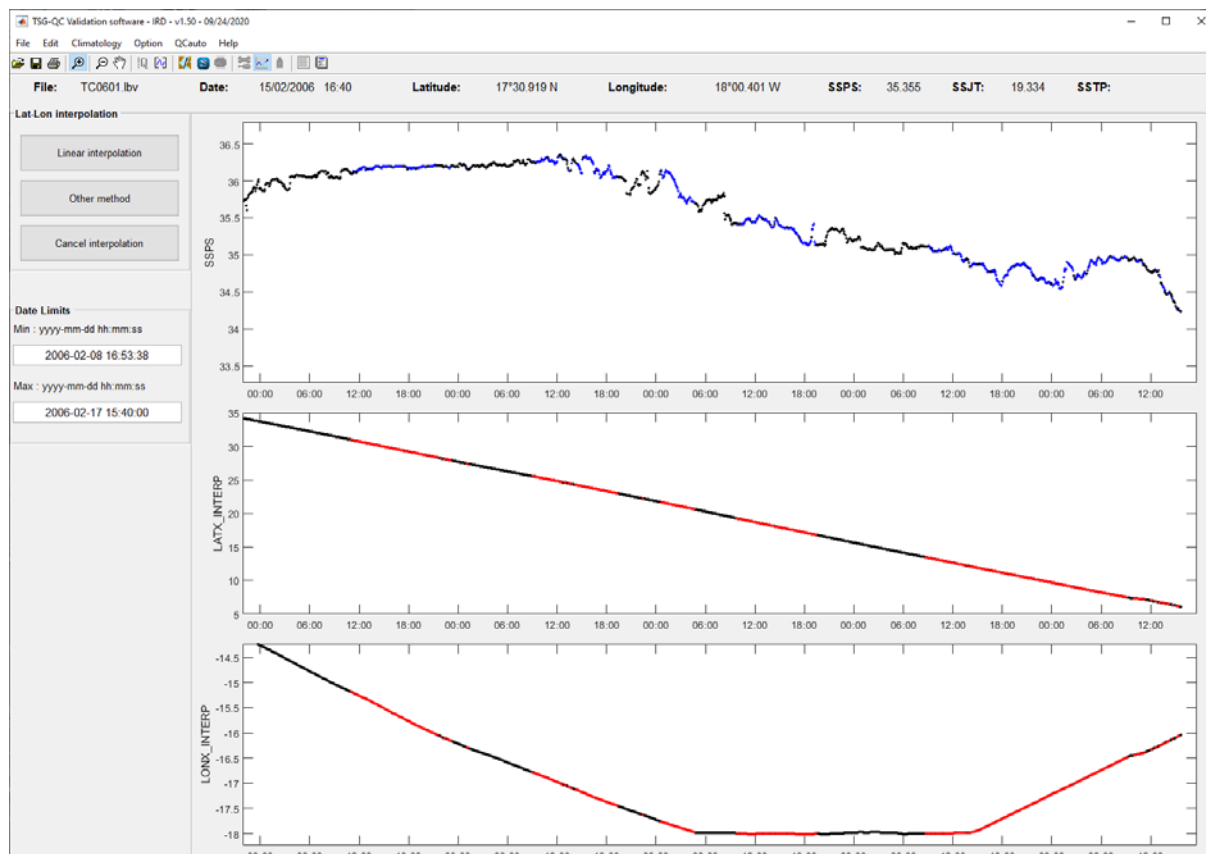


Figure 36: Position interpolation module

The upper plot displays the salinity time series. Blue points indicate measurements without position. The middle plot displays the latitude of the measurements and the bottom plot the longitudes.

Once the user has clicked on the **Linear Interpolation** button, interpolated latitudes and longitudes are drawn in red (plots 2 and 3). To check the validity of the interpolation it is better to zoom in. The quality code of the latitude and longitude (**POSITION_QC**) is set to 8 (code: **Interpolated value**).



You can make the interpolation only on some section of the ship track. In that case use the Date Limits tools to select the temporal limits (see p 27).

I. Correcting the data



TSG data can be corrected by comparison with discrete samples (Water Sample, CTD, XCTD, ARGO...).

The parameter (**SSPS**, **SSTP**...) that will be corrected must first be displayed in the upper plot of the calibration window of **TSGQC** (see p. 21).

Data corrected are stored in variables with the extension **_ADJUSTED**: **SSPS_ADJUSTED**, **SSTP_ADJUSTED**, The raw data are not modified.

If corrections are not applied to the entire time series but only to some part of the measurements, the **_ADJUSTED** variables only contain corrected data. The other elements of the **_ADJUSTED** variables are set to NaN (Not a Number).

An error is assigned to every corrected measure (see the algorithms p. 39). Error values are stored in variables with the extension **_ADJUSTED_ERROR**.

The quality code of the adjusted data, **_ADJUSTED_QC**, is identical to the quality code assigned to the raw variable (**_QC**).

The correction module window looks like this:

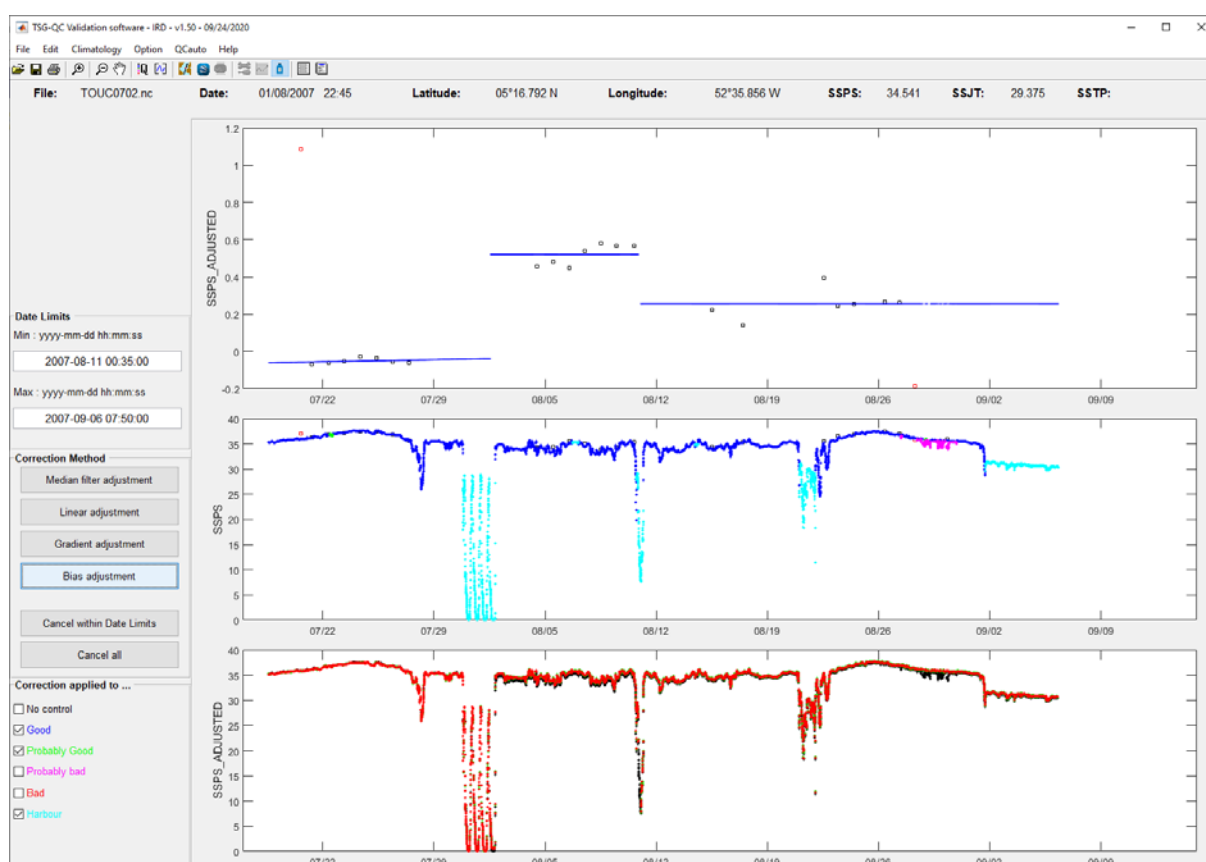


Figure 37: Correction module

1. Description

Upper plot

Differences between discrete **samples** and **TSG** data are drawn in the upper plot.

Square markers are used to plot Water samples collected on board merchant ship (identified by a **SSPS_EXT_TYPE** value set to **WS** in *.btl files). Circle markers are used for the other samples (ARGO, CTD ... in files with extension *.spl, *.arg).

The blue curve is the correction that will be applied to the TSG data. The correction can be made in several parts and is not necessary applied on the entire time series.



Quality codes can be attributed to **samples** with the same method than for the **TSG** time series (see p. 30).

Remark:


If for some **samples** there is no **TSG** measurements close in time or if the **TSG** measurements have quality code sets to **PROBABLY BAD** or **BAD** the differences are not drawn in the upper plot.

Middle plot

The raw **TSG** time series colored with its quality codes is drawn in this figure.

Bottom plot

In this figure the following elements are drawn :



- 1) In black, the raw TSG time series
- 2) In red, the adjusted TSG time series.
 - a) Either after being calibrated.
 - b) Or after correction with discrete samples. Adjusted data from comparison with discrete samples replace calibrated data. If this correction is cancelled, the calibrated time series reappears.
- 3) In green, the error on the adjusted TSG time series.

2. Functionalities

Quality codes of discrete samples



Quality codes can be attributed to **samples** with the same method than for the **TSG** time series (see p. 30).

Only discrete samples with quality codes set to **NO_CONTROL**, **GOOD**, and **PROBABLY_GOOD** are used to compute the correction applied to the **TSG** time series.

Choice of date limits

Date Limits

Min : yyyy-mm-dd hh:mm:ss

2007-07-18 08:40:00

Max : yyyy-mm-dd hh:mm:ss

2007-09-07 09:10:00

Figure 38: Choice of a time limit



The correction can be applied on the entire time series or to parts of it. This is done using the time selection tool (see p 27).

Correction depending on the quality code

Correction is applied to the raw TSG time series depending on the quality codes. To select the quality codes that will determine which part of the time series will be adjusted, click the check boxes in the panel figure **Correction applied to....**

In the following example the correction will be applied only to TSG measurements with a **GOOD** and **PROBABLY GOOD** quality code.

Correction applied to ...

☐ No control

☒ Good

☒ Probably Good

☐ Probably bad

☐ Bad

☐ Harbour

Figure 39: Choice of correction according to QC

Correction Methods

Four different methods of correction can be applied to the **TSG** time series (or part of). Different methods of corrections can be applied to different parts of the time series.

Corrections or part of them can be cancelled.

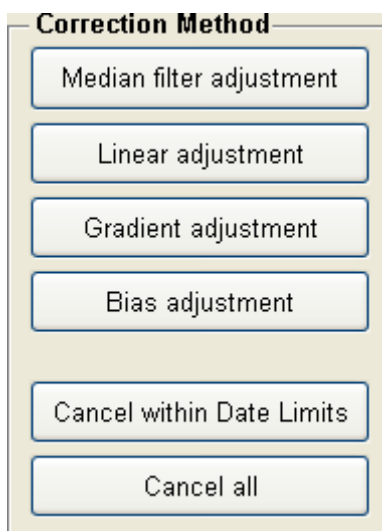


Figure 40: : Sélection du type de correction

Median filter adjustment

Running median filter. See the algorithm p. 39

Detail of the algorithm is described in the following document:

G. Reverdin, F. Gaillard, S. Contardo, D. Mathias, Y. Gouriou, D. Dagorne, *Réseau bleu Coriolis : Qualification des mesures navires/ Salinité de surface*, Coriolis, pp 60, septembre 2006.

Linear adjustment

Linear adjustment, to correct instrumental drift mainly due to biofouling of the sensor.

See the algorithm p. 40

Gradient adjustment

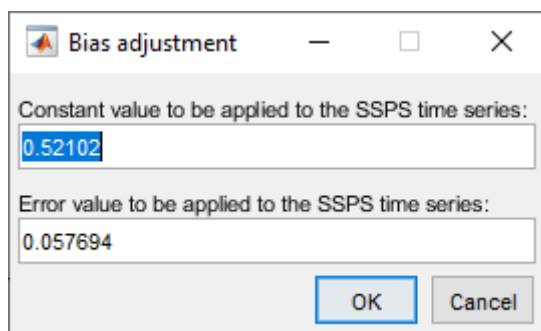
Gradient adjustment, to smoothly correct TSG time series in regions of strong salinity/temperature gradient where the TSG/sample difference shifts sharply across the gradient

See the algorithm p. 40

Bias adjustment

Bias adjustment, to apply a constant correction estimated from a climatology or other trips, when no sample is available.

Enter the bias in the following input dialog box:

A screenshot of a software dialog box titled "Bias adjustment". It contains two input fields. The first field is labeled "Constant value to be applied to the SSPS time series:" and contains the value "0.52102". The second field is labeled "Error value to be applied to the SSPS time series:" and contains the value "0.057694". At the bottom right of the dialog are two buttons: "OK" and "Cancel".

Field	Value
Constant value to be applied to the SSPS time series:	0.52102
Error value to be applied to the SSPS time series:	0.057694

Figure 41: Bias input dialog box

Cancel within Date Limits

The push-button '**Cancel within Date Limits**' can be used to cancel the correction applied on sections of the **TSG** time series. The section is defined by its time limits (panel '**Date Limits**').



The time-limits selection is made using the **Date limits** tool (see p 28).

Cancel all

The push-button '**Cancel all**' cancels all the corrections applied to the time series.

3. Algorithms

a) Median filter correction

The method, defined in function `corTsgMedian.m`, is composed of several steps :

Step 1: Difference between discrete samples and TSG data

- 1) Data are collocated in time. **TSGQC** selects the **TSG** measurements which are the closest to the **sample**. Function: `diffTsgSample.m`.
- 2) The sample data are not compared to the collocated **TSG** measurements but to a mean of **TSG** measurement around the collocated **TSG** data. Function: `tsg_average.m`.
 - a) The **TSG** average is computed with measurements with a quality code: **NO_CONTROL**, **GOOD**, and **PROBABLY_GOOD**.
 - b) The window used to calculate the average is given by the variable `tsg.cst.TSG_DT_SMOOTH`. This variable is defined in the `tsg_initialisation.m` function. The window is equal to 1 hour.
 - c) A rejection test of the **TSG** data, based on the standard deviation, is performed to exclude **TSG** data with too much dispersion. TSG data which deviate more than **STD_MAX** from the average are excluded. This value is defined in the `tsg_initialisation.m` function. It is equal to 0.1 for salinity and 1°C for temperature.
- 3) -Sample-**TSG** difference is computed as soon as the 2 measurements are not more distant in time than **TSG_WS_TIMEDIFF**. This value is defined in the `tsg_initialisation.m` function. It is equal to 5 minutes.

Smoothing of TSG time-series	
TSG DT SMOOTH (in min)	60
Maximum time difference between tsg data and water sample used to compute the difference	
WS Dime diff (in min)	5
Salinity, in 1 hour interval, should not depart the average for more than SAL_STD_MAX standard deviation	
SSPS STD Max	0.1

Figure 42: Median filter correction parameters

Surface salinity is a quantity that can vary quickly; the comparison of TSG data with water samples, whose dating is not always very precise, is complicated by the presence of salinity peaks, even if they are real. That is why **TSG** data are smoothed over 1 hour time period. We thus avoid comparing water samples to outlying salinity measurements (not representative) and then to produce a bad estimation of the correction to be applied to the TSG salinities.

Step 2: Correction

- 1) Only samples with a quality code equal to: **NO_CONTROL**, **GOOD**, and **PROBABLY_GOOD** are taken into account.

- 2) For each point of comparison **TSGQC** computes the mean value and the standard deviation of the differences **Samples** minus **TSG** in a `COR_TIME_WINDOWS` window. This value is defined in the `tsg_initialisation.m` function. It is equal to 10 days. Samples deviating more than 3 times the standard deviation from the average are eliminated. Their quality code is set to **BAD**.
- 3) For each comparison point **TSGQC** computes the median value of the differences **Samples - TSG** in the window `COR_TIME_WINDOWS`.
- 4) The median values of the differences are then linearly interpolated at the date of the **TSG** measurements and the correction is added to the raw **TSG** data.

Step 3: Error calculation

An estimated correction error is then computed for each TSG measurement. The error is a function of the number of point of comparison (= N) used to compute the correction value:

- if $N < 4$: error = 1.
- if $N \geq 4$: error = standard deviation (sample - TSG) / $\sqrt{(N-1)}$

In no case the error cannot be less than 0.01. If lower errors are computed they are put to 0.01.

b) Linear adjustment

The method, defined in function `corTsgLinear.m`, is composed of several steps :

Step 1: Difference between discrete sample and TSG data

Cf. paragraph a) Median filter correction p. 39

Step 2 : Correction

TSGQC uses the MATLAB function `polyfit` to find the line best-fitting (least squares) the sample – TSG differences. The linear adjustment is made with at minimum 3 samples.

If there are only 2 samples, TSGQC computes a mean difference.

Step 3: Error calculation

The error of the linear adjustment is computed using the MATLAB function `polyval` and corresponds to the uncertainty on the slope of the best-fitting line.

In any case there are only 2 samples, the error is equal to the mean difference divided by 2.

In no case the error cannot be less than the sensor accuracy (computed in `tsg_accuracy.m`), which is around of the order of 0.01. If lower errors are computed they are set to the sensor accuracy.

c) Gradient adjustment

Step 1: Difference between discrete sample and TSG data

Cf. paragraph a) Median filter correction p. 39

Step 2: Correction

Between two consecutive samples in the correction window where TSG-sample differences are D1 and D2, the correction value D varies from D1 to D2 as a linear function of the salinity (or temperature) variations of the TSG.

Step 3: Error calculation

The default error value is half the correction value. If the error computed this way is smaller than the sensor accuracy (about 0.01), then the latter is used as the error value.

J. Data processing report



Click on this icon to get a simplified report on the processing of the TSG.

The report file has the following format:

TSGQC REPORT
03-Aug-2010 10:06:08

TSG file : D:\svn\tsg-qc\tsg_data\touc0702.nc

No water sample file used during this session

No external sample file used during this session

14684 total number of records

0 records have interpolated position

0 records have been deleted because they have no date

0 records deleted because their date are not increasing

0 records deleted because of velocity > 50 knots

***** CNDC PARAMETER *****

Time series not calibrated

Number of measurements : 14684

***** SSPS PARAMETER *****

Time series not calibrated

Number of measurements : 14684

43 - 0.29 % NO_CONTROL code
11445 - 77.94 % GOOD code
355 - 2.42 % PROBABLY_GOOD code
433 - 2.95 % PROBABLY_BAD code
1633 - 11.12 % BAD code
0 - 0.00 % VALUE_CHANGED code
754 - 5.13 % HARBOUR code
0 - 0.00 % NOT_USED code
0 - 0.00 % INTERPOLATED_VALUE code
21 - 0.14 % MISSING_VALUE code

6504 - 44.29 % records have been corrected

9 ARGO samples in the file
24 WS samples in the file
No CTD sample
No XBT sample

***** SSJT PARAMETER *****

Time series not calibrated

Number of measurements : 14684

14663 - 99.86 % NO_CONTROL code

0 - 0.00 % GOOD code
0 - 0.00 % PROBABLY_GOOD code
0 - 0.00 % PROBABLY_BAD code
0 - 0.00 % BAD code
0 - 0.00 % VALUE_CHANGED code
0 - 0.00 % HARBOUR code
0 - 0.00 % NOT_USED code
0 - 0.00 % INTERPOLATED_VALUE code
21 - 0.14 % MISSING_VALUE code

No records have been adjusted

***** SSTP PARAMETER *****

no time series

K. Exit TSGQC

If the **TSG** measurements have been modified (quality codes, adjustment, etc.) and if the file has not been saved the following message box is displayed:

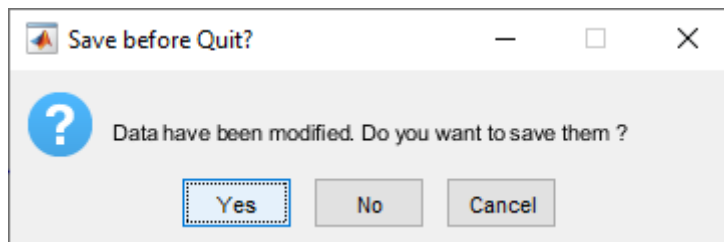


Figure 43: Save before exit dialog box

7. Data Format

A. Name of the variables

The variable names used in **TSGQC** follow the ROSCOP Parameter Code. All the variables are described in the **CORTSG_format_gosud.doc** document.

The same variable names are used to write and read the header of the ASCII files.

TSGQC makes a distinction between high resolution **TSG** data (< 5 minutes) and discrete **sample** data (Water samples, CTD, ARGO, XBT, XCTD, etc.).

1. Main variables used for TSG data

The main variables used to describe the **TSG** data are:

DATE	Date (string 'YYYYMMDDHHMMSS')
DAYD	Julian day
LATX	Latitude in decimal degree
LONX	Longitude in decimal degree
CNDC	Conductivity measured by the TSG
SSPS	Salinity computed by using CNDC and SSJT
SSJT	Temperature measured by the TSG
SSTP	Temperature measured with a precise sensor (SBE 38 for example)
SPDC	Speed ship (in knots).
FLOW	Flow of pipe that feeds the TSG
PRES	Water pressure in the TSG

Secondary variables based on these main variables are built. Some example for the SSPS variable:

SSPS_QC	Quality code assigned to SSPS
SSPS_CAL	Calibrated SSPS time series
SSPS_ADJUSTED	Adjusted SSPS time series
SSPS_ADJUSTED_QC	Quality code assigned to SSPS
SSPS_ADJUSTED_ERROR	Error assigned to adjusted SSPS time series

Note on the differences between XXXX, XXXX **CAL**, XXXX **ADJUSTED** where XXXX = SSPS, SSJT, SSTP

XXXX is the raw data (SSJT, SSTP) or is computed (SSPS).

A quality code can be assigned to this data: variable XXXX_QC.

Raw data variable are neither modified nor deleted. If a modification is applied a new variable is created.

Calibrated data: XXXX_CAL.

If a calibration is made the variable XXXX.CAL is created but there is no XXXX_CAL_QC variable. The user must use the quality code of the raw variable: XXXX_QC

Adjusted data: XXXX_ADJUSTED

If a correction is made to the time series the variable XXXX.ADJUSTED is created. This variable only contains corrected measurements. If part of the time series is not corrected those measurements are not stored in the adjusted variable, their value is set to NaN (Not a Number).

An error estimation is assigned to the adjusted data. It is stored in the XXXX_ADJUSTED_ERROR variable.

The quality code, XXXX_ADJUSTED_QC, assigned to the XXXX_ADJUSTED variable is equal to the quality code assigned to the raw data.

To summarize, when you want to work with TSG data you must check the existence of the following variables, in that order:

1 – XXXX_ADJUSTED.

If the variable exists and is not empty, correction has been applied to the raw data. An error is given by the XXXX_ADJUSTED_ERROR variable and the quality code by the XXXX_ADJUSTED_QC variable.

2 – If the XXXX_ADJUSTED variable is empty you must check if XXXX_CAL exists

In that case a calibration has been performed. Use then the XXXX_QC variable to get the quality codes assigned to the measurements.

3 – In case there is no XXXX_ADJUSTED and XXXX_CAL variables, use the XXXX and XXXX_QC variables.

Remark:

During the same trip, the availability of these different variables may change over time. Thus, the variable XXXX_ADJUSTED will only be defined for the sections of the trip where external data are available, while the variable XXXX alone may be available and usable elsewhere.

2. Discrete sample

Discrete sample variables have the extension _EXT.

DATE_EXT	Date (string 'YYYYMMDDHHMMSS')
DAYD_EXT	Julian day
LATX_EXT	Latitude in decimal degree
LONX_EXT	Longitude in decimal degree
SSPS_EXT	Salinity
SSTP_EXT	Temperature

The SSJT time series can be corrected by using SSTP_EXT data.

Derived variables are:

SSPS_EXT_QC	SSPS Quality codes
SSTP_EXT_QC	SSTP Quality codes
SSPS_EXT_TYPE	Instrument used to get the samples (4 digits): ARGO ARGO measurements CTD CTD measurements UNKN Unknown WS (W ater S ample) Water sample analysed in laboratory etc.
SSTP_EXT_TYPE	Instrument used to get the samples (4 digits): ARGO ARGO measurements CTD CTD measurements UNKN Unknown etc.

B. Input files

TSGQC can read data files with the following format:

- | | |
|--|-------|
| 1. ARGO | p. 47 |
| 2. ASCII | p. 49 |
| 3. ASTROLABE | p. 48 |
| 4. Merchant ship (Logiciel SODA - SOERE SSS) | p. 50 |
| 5. NetCDF GOSUD | p. 50 |
| 6. ORACLE | p. ?? |
| 7. SDF | p. ?? |
| 8. NUKA ARCTICA | p. ?? |

Filename extensions are:

TSG data

ASCII	.tsgqc
ASTROLABE	.ast
NetCDF	.nc
SOERE SSS	.lbv (formerly.ora or .sdf)
NUKA ARCTICA	.transmit*

Sample data

ASCII	.btl	for water sample.
	.spl	for every type of discrete measurements (CTD ...)
ARGO	.arg	ARGO data in LOCEAN format.

C. Output files

TSGQC can write data files with the following format:

1. NetCDF GOSUD - see [CORTSG_format_gosud.doc](#)

NetCDF files allow the user to keep all the information about the TSG measurements: meta-data, TSG time series, sample data.

This is the default output format

2. ASCII

This format can be used for TSG time series and discrete sample. The format is the same for input and output files.

A description of the format is available p. 49

D. ARGO Format (*.arg)

Nicolas Martin (Engineer at LOCEAN) developed a software that collocates ARGO floats position and ship track. The collocation is made for **TSG** data managed by the Coriolis data center. ARGO

measurements are kept if they are found at the surface at less than 50 km and 5 days of the ship trajectory.

The internet address of the collocalisation ARGO-TSG site is:

<http://www.locean-ipsl.upmc.fr/~TSG-ARGO/>

The site is daily updated.

In the ARGO file there is one line per ARGO collocalisation.

- 1-6 Date of the ARGO profile: YYYY-MM-DD HH:MI:SS
- 7 Longitude of the ARGO profile
- 8 Latitude of the ARGO profile
- 9 Profiler number
- 10 Cycle number
- 11 Pressure of the ARGO measurement (*)
- 12 Pressure quality
- 13 ARGO salinity
- 14 Salinity quality code
- 15 ARGO temperature
- 16 Temperature quality code
- 17 Mean time difference between the ARGO et TSG measurements (**)
- 18 Mean distance between the ARGO et TSG measurements
- 19 Number of TSG salinity
- 20 Average of TSG salinity
- 21 Standard deviation of TSG salinity
- 22 Number of TSG temperature
- 23 Average of TSG temperature
- 24 Standard deviation of TSG temperature
- (*) By default it is the pressure the closest to 5 m, between 0 and 10 m and with quality code of '1' or '2'
- (**) Less than R km and at +/-J days (by default R = 50 km and J = 5 days)

Important

TSGQC adds the mean time difference between the **ARGO** and **TSG** measurements (column n°17) to the date of the ARGO profile. It is that date which is stored in **NetCDF** and ***.spl** files.

E. ASTROLABE Format (*.ast)

This format has been created for the ASTROLABE ship **TSG** by Elodie Kestenare (UMR LEGOS).

Example :

```
%HEADER DDMMYY hh mi ss LATX LONX T_canisterRaw T_remoteRaw SSSraw SSJT
SSTP SSPS SSPS_ADJUSTED PRES
211009 0 0 0 -42.8824 147.3407 12.9442 12.8127
33.1911 -99.0000 -99.0000 -99.0000 -99.0000 1.73
211009 0 1 0 -42.8824 147.3407 12.9442 12.8133
33.1935 -99.0000 -99.0000 -99.0000 -99.0000 1.75
211009 0 2 0 -42.8824 147.3407 12.9442 12.8150
33.1950 -99.0000 -99.0000 -99.0000 -99.0000 1.75
211009 0 3 0 -42.8824 147.3407 12.9449 12.8152
33.1971 -99.0000 -99.0000 -99.0000 -99.0000 1.75
211009 0 4 0 -42.8824 147.3407 12.9462 12.8171
33.2006 -99.0000 -99.0000 -99.0000 -99.0000 1.75
211009 0 5 0 -42.8824 147.3407 12.9471 12.8213
33.2028 -99.0000 -99.0000 -99.0000 -99.0000 1.75
```


211009	0	6	0	-42.8824	147.3408	12.9484	12.8229
33.2043		-99.0000		-99.0000	-99.0000	-99.0000	1.74

F. ASCII Format (*.btl, *.spl, *.tsgqc)

Files with ASCII format have the same structure for **TSG (*.tsgqc)** and sample files (*.btl, *.spl):

TSG data

```
%PLATFORM_NAME TOUCAN
%HEADER YEAR MNTH DAYX hh mi ss LATX LONX SSPS SSPS_QC SSJT SSJT_QC SSTP SSTP_QC
2007 07 18 14 20 32 49.9168510 -3.0475171 35.300 0 15.702 0 NaN 9
2007 07 18 14 25 32 49.9076500 -3.0808330 35.290 0 16.028 0 NaN 9
2007 07 18 14 30 32 49.8984489 -3.1142170 35.281 0 15.997 0 NaN 9
2007 07 18 14 35 32 49.8893013 -3.1478500 35.273 0 16.130 0 NaN 9
2007 07 18 14 40 32 49.8801155 -3.1815331 35.260 0 16.170 0 NaN 9
2007 07 18 14 45 32 49.8716011 -3.2158000 35.262 0 16.296 0 NaN 9
```

There can be one or more header line. They must begin with the '%' character. Metadata can be written in the header lines. In that case you must first indicate the variable name listed in the NetCDF format (see **CORTSG_format_gosud.doc**)

The header line beginning with %HEADER is absolutely necessary. This line describes the variables available in the file.

The 6 first variables are necessary (in that order):

- year YEAR
- month MNTH
- day DAYX
- hour hh
- minutes mi
- seconds ss

Then the order of the NetCDF variables is not imposed. In the preceding example the file contains the following variables:

LATX	Latitude
LONX	Longitude
SSPS	TSG salinity
SSPS_QC	Salinity quality code
SSJT	TSG temperature
SSJT_QC	TSG temperature quality code
SSTP	Temperature sensor
SSTP_QC	Temperature sensor quality code

In the preceding example the name of the ship where the TSG is installed is assigned to the **NetCDF** variable '**PLATFORM_NAME**'.

Warning

*.spl files can be used:

1. to load discrete samples
2. to export in a unique file discrete samples data.

TSGQC adds the mean time difference between the **ARGO** and **TSG** measurements (column n°17) to the date of the ARGO profile. It is that date which is stored in **NetCDF** and ***.spl** files.

G. NetCDF format (*.nc)

NetCDF files allow the user to keep all the information about the **TSG** measurements: meta-data, **TSG** time series, sample data..

The format is described in the document [CORTSG_format_gosud.pdf](#)

H. SODA format (*.lbv)

This format is used for the acquisition of **TSG** data onboard merchant ships managed by the SOERE SSS.

The acquisition software **SODA**⁹ is developed under LabView by David Varillon¹⁰. The software documentation: **SODA_User_manual.pdf** is available on demand.

I. NUKA ARTICA format (*.transmit*)

This format has been created for the Nuka Arctica ship TSG by Gilles Reverdin (UMR LOCEAN).

Example :

46	NUK	2001	7	7	1741	59.40	-0.05	13.29	34.846
46	NUK	2001	7	7	1746	59.40	-0.10	13.23	34.932
46	NUK	2001	7	7	1751	59.42	-0.13	13.16	34.959
46	NUK	2001	7	7	1756	59.42	-0.18	13.16	34.954
46	NUK	2001	7	7	18 1	59.43	-0.22	13.17	34.970
46	NUK	2001	7	7	18 6	59.43	-0.27	13.10	34.983
46	NUK	2001	7	7	1811	59.45	-0.30	13.04	34.984
46	NUK	2001	7	7	1816	59.45	-0.35	12.99	34.986
46	NUK	2001	7	7	1821	59.47	-0.38	12.92	34.984
46	NUK	2001	7	7	1826	59.48	-0.43	12.92	34.981

J. Format des fichiers ORACLE (*.ora)

This format was formerly used for the **TSG** data of merchant ships managed by the SOERE SSS.

K. Format des fichiers SDF (*.sdf)

This format was formerly used for the **TSG** data of merchant ships managed by the SOERE SSS.

L. Configuration file format (*.ini)

The *.ini files are used for the configuration of the SODA acquisition software. When reading *.lbv or *.tsgqc files, if an .ini file is present in the directory with the same name, it will be read by TSGQC and the meta-data will be automatically imported.

⁹ Varillon D., Shipboard Oceanographic Data Acquisition - S.O.D.A Version 1.00 - Manuel d'utilisateur, 2009

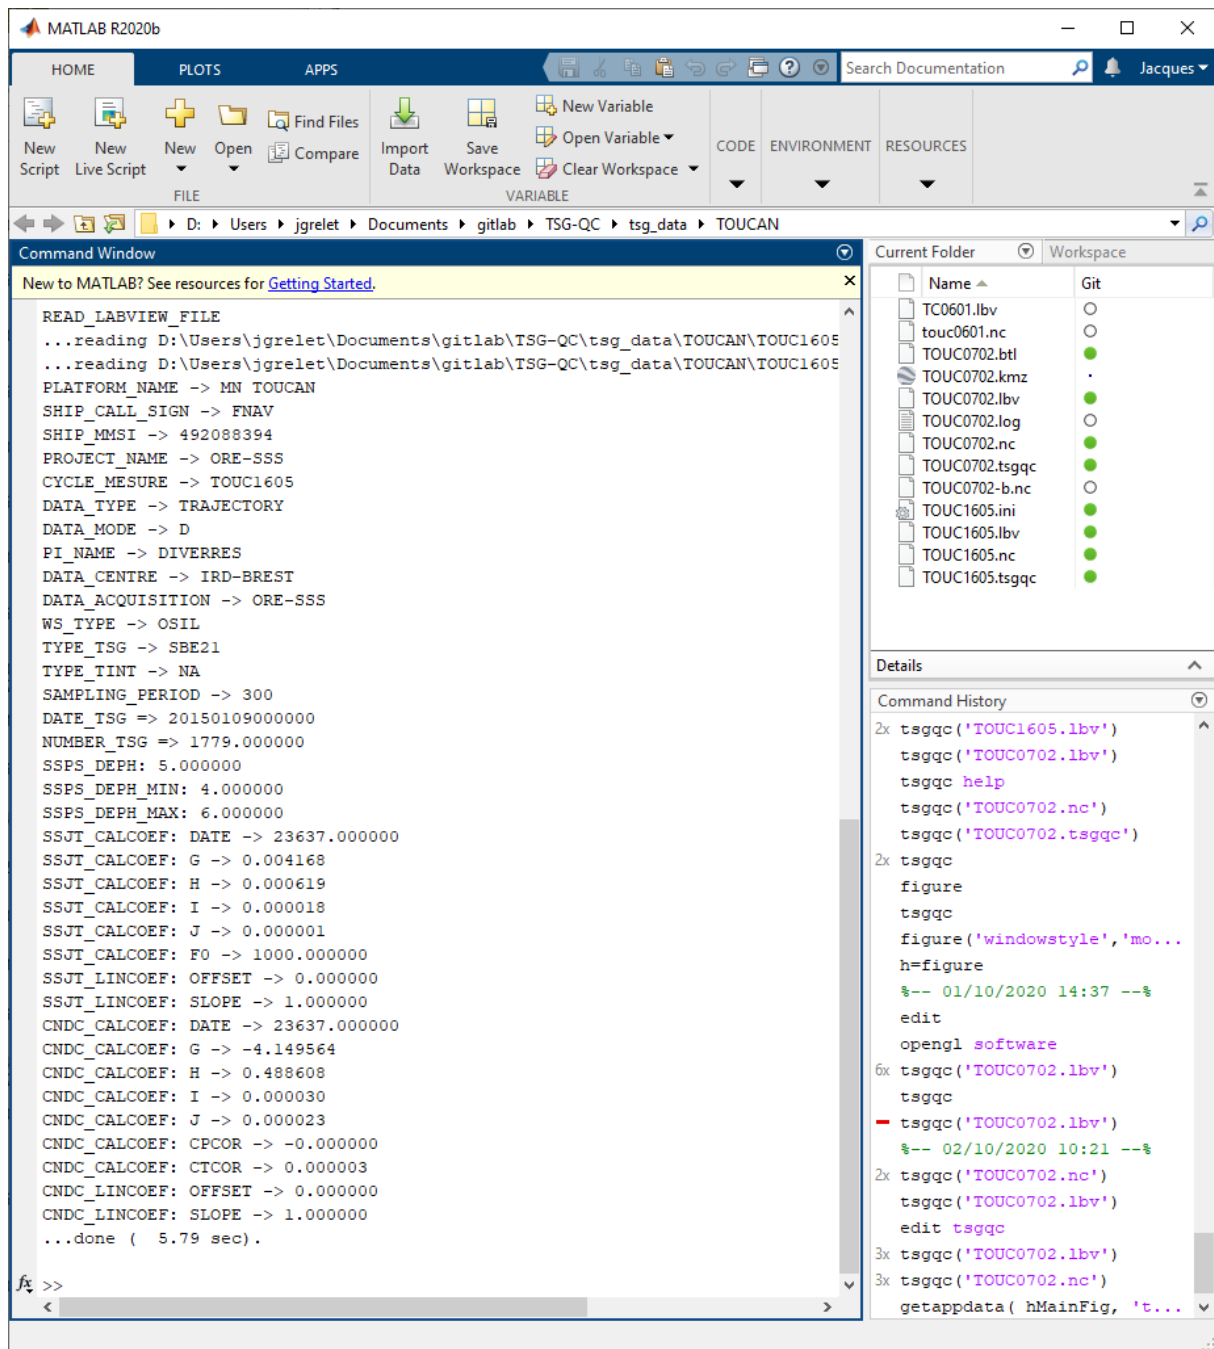
¹⁰ IRD - US191 IMAGO – Nouméa, New Caledonia.

Example file CSLO1604.INI :

```
[GLOBAL]
PLATFORM_NAME = "Cap San Lorenzo"
SHIP_CALL_SIGN = "LXSQ"
SHIP_MMSI = "253126000"
PROJECT_NAME = "ORE-SSS"
CYCLE_MESURE = "CSLO1604"
DATA_TYPE = "TRAJECTORY"
DATA_MODE = "D"
PI_NAME = "DIVERRES"
DATA_CENTRE = "IRD-BREST"
DATA_ACQUISITION = "ORE-SSS"
WS_TYPE = "OSIL"
TYPE_TSG = "SBE21"
TYPE_TINT = "NA"
SAMPLING_PERIOD = "300"
```

Example of reading and displaying a .tsgqc file and the .ini file if present in the same directory. To display the contents of an .ini file in the Matlab console, the TSGQC software must be launched in "debug" mode with the following command:

```
>> tsgqc('debug','true')
```



M. Climatology file format

The climatology files used by TSGQC are in NetCDF format and extracted from :

- the WOA05, WOA13 and WOA18 atlas (WORLD OCEAN ATLAS):
<https://www.nodc.noaa.gov/OC5/woa18/>
- the climatology of the LOPS (IFREMER) ISAS13 and ISAS15:
<https://www.seanoe.org/data/00412/52367/>

TSGQC uses reduced **NetCDF** files containing only the climatology at 0 and 5 m.

Data are available in 3 files: annual, seasonal, monthly

The available variables are :

WOA_MEAN_SSTP: temperature

WOA_MEAN_SSPTS: salinity

WOA_MEAN_DOX: oxygen

with the standard deviation (WOA_STD_SSTP) and the number of observations used to build the climatology (WOA_OBS_SSTP).

In these NetCDF files, the dimension WOA_TIME will take the following values for:

WOA_TIME = 1 for the annual file

WOA_TIME = 4 for the seasonal file

WOA_TIME = 12 for the monthly file

Example of seasonal file structure with the ncdump command :

```
$ ncdump -h woal3_annual_surf.nc
NetCDF woal3_annual_surf {
dimensions:
    WOA_TIME = 1 ;
    WOA_DEPH = 2 ;
    WOA_LONX = 1440 ;
    WOA_LATX = 720 ;
variables:
    float WOA_TIME(WOA_TIME) ;
    float WOA_DEPH(WOA_DEPH) ;
        WOA_DEPH:units = "Depth" ;
        WOA_DEPH:long_name = "meters" ;
        WOA_DEPH:_FillValue = -99.9999f ;
    float WOA_LATX(WOA_LATX) ;
        WOA_LATX:units = "Latitude" ;
        WOA_LATX:long_name = "degree_north" ;
        WOA_LATX:_FillValue = -99.9999f ;
    float WOA_LONX(WOA_LONX) ;
        WOA_LONX:units = "Longitude" ;
        WOA_LONX:long_name = "degree_east" ;
        WOA_LONX:_FillValue = -99.9999f ;
    float WOA_MEAN_SSTP(WOA_TIME, WOA_DEPH, WOA_LATX, WOA_LONX) ;
        WOA_MEAN_SSTP:units = "Sea Surface Temperature mean" ;
        WOA_MEAN_SSTP:long_name = "degre Celcius" ;
        WOA_MEAN_SSTP:_FillValue = -99.9999f ;
    float WOA_MEAN_SSPTS(WOA_TIME, WOA_DEPH, WOA_LATX, WOA_LONX) ;
        WOA_MEAN_SSPTS:units = "Sea Surface Salinity mean" ;
        WOA_MEAN_SSPTS:long_name = "PSU" ;
        WOA_MEAN_SSPTS:_FillValue = -99.9999f ;
    float WOA_STD_SSTP(WOA_TIME, WOA_DEPH, WOA_LATX, WOA_LONX) ;
        WOA_STD_SSTP:units = "Sea Surface Temperature standard
deviation" ;
        WOA_STD_SSTP:long_name = "degre Celcius" ;
        WOA_STD_SSTP:_FillValue = -99.9999f ;
    float WOA_STD_SSPTS(WOA_TIME, WOA_DEPH, WOA_LATX, WOA_LONX) ;
        WOA_STD_SSPTS:units = "Sea Surface Salinity standard
deviation" ;
        WOA_STD_SSPTS:long_name = "PSU" ;
```

```

        WOA_STD_SSPTS:_FillValue = -99.9999f ;
    short WOA_OBS_SSTP(WOA_TIME, WOA_DEPH, WOA_LATX, WOA_LONX) ;
        WOA_OBS_SSTP:units = "Sea Surface Temperature number
observation" ;
        WOA_OBS_SSTP:long_name = "none" ;
        WOA_OBS_SSTP:_FillValue = -100s ;
    short WOA_OBS_SSPTS(WOA_TIME, WOA_DEPH, WOA_LATX, WOA_LONX) ;
        WOA_OBS_SSPTS:units = "Sea Surface Salinity number
observation" ;
        WOA_OBS_SSPTS:long_name = "none" ;
        WOA_OBS_SSPTS:_FillValue = -100s ;

// global attributes:
        :description = "WOA13 CLIMATOLOGY Surface temperature
salinity annual" ;
        :author = "J Grelet IRD US191 Brest" ;
        :date = "03 Jul 2018" ;

```

N. Glossary

GOSUD	Global Ocean Surface Underway Data www.ifremer.fr/gosud/
CORTSG	GOSUD Data format TSG
NetCDF	Network Common Data Form https://www.unidata.ucar.edu/software/NetCDF/
ROSCOP	Report of Observations/Samples Collected by Oceanographic Programmes http://www.ices.dk/Ocean/roscop/index.asp
SOERE SSS	Systèmes d'Observation et d'Expérimentation pour la Recherche en Environnement Sea Surface Salinity http://www.legos.obs-mip.fr/fr/observations/sss/
WOA	WORLD OCEAN ATLAS https://www.nodc.noaa.gov/OC5/woa18/
ISAS	In Situ Analysis System (ISAS): A Global T-S Analysis https://www.umr-lops.fr/SNO-Argo/Products/ISAS-T-S-fields

8. List of figures

Figure 1: TSGQC menus	6
Figure 2: Getting Started	7
Figure 3: Icon bar	9
Figure 4: File menu	10
Figure 5: Climatology menu	10
Figure 6: Option menu	11
Figure 7: Preferences setting	11
Figure 8: Quality Control menu	12
Figure 9: Help menu.....	12
Figure 10: Help dialog box.....	13
Figure 11: Opening a file	14
Figure 12: : Test on duplicate recordings.....	15
Figure 13: Dialog box, error while reading samples.....	15
Figure 14: SODA software, selection of parameters.....	16
Figure 15: Sample reading dialog box	17
Figure 16: Dialog box, error while reading samples before data	17
Figure 17: NetCDF Metadata Entry Form	18
Figure 18: Export in ASCII.....	19
Figure 19: : Choice of parameters exported in ASCII	19
Figure 20: Choice of parameters exported in ASCII.....	20
Figure 21: Main graphic window	21
Figure 22: Secondary Graphic Choice	22
Figure 23: Main graphic choice	22
Figure 24: Lower graphic choice.....	22
Figure 25: Climatology display	23
Figure 26: Cartography display with the m_map toolbox.....	24
Figure 27: Cartography display with surface climatology, pcolor mode.....	25
Figure 28: Cartography display with surface climatology, contour mode	25
Figure 29: Displaying Google Earth cartography	26
Figure 30: Zoom function	27
Figure 31: Selection of time limits.....	28
Figure 32: Printing of figures	29
Figure 33: Validation module	30
Figure 34: Display of the vertical selection bar	31
Figure 35: Calibration module display	32
Figure 36: Position interpolation module.....	33
Figure 37: Correction module	34
Figure 38: Choice of a time limit	36
Figure 39: Choice of correction according to QC	36
Figure 40: : Sélection du type de correction	37
Figure 41: Bias input dialog box	38
Figure 42: Median filter correction parameters.....	39
Figure 43: Save before exit dialog box	44
Figure 44: Matlab console for displaying an .ini parameter file	52